



How to use the program mode [I]

To save the setting data Function setting [SAVE*]


(Two types of data, [SAVE1] and [SAVE2] can be saved. The [SAVE1] data can be read out with [LOAD1], and the [SAVE2] data with [LOAD2].)

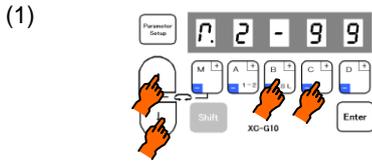


* Enter program mode [I]
([↓] + [↑] + [B] + [C] key)

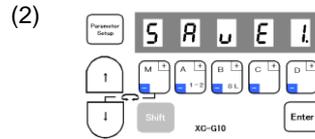

* Program mode [I] will be entered.

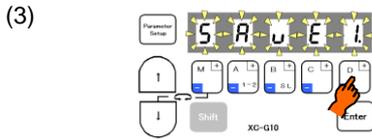

* When the [D] key is held down, [SAVE1.] will flicker, and the save process will be executed.

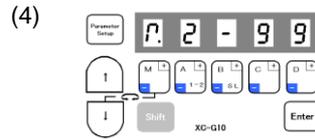

* Press [D] key over 2 seconds or more, and then the normal mode will be returned to. (Process is completed)

Description


- A. The current setting data can be saved as simple settings. Saving the data is completed when the [D] key is held down for two or more seconds while [SAVE*] is displayed and the display returns to the normal mode.
- B. To return to the normal mode from the [SAVE*] display without saving the data, press the [↑] key while holding down the [↓] key. The set data will not be saved.
- C. The saved setting data is saved in the program mode {1} simple setting [LOAD1] or [LOAD2], and can be read out by selecting [LOAD1] or [LOAD2] with program mode [1].
(As the factory setting, the [412B] data is saved in the simple settings [LOAD1] and the [280M] data is saved in the simple settings [LOAD2].)

Caution


When this function setting [SAVE*] is used, the settings saved in the program mode [1] simple setting [LOAD*] before the new data was set will all be cleared. The current setting data will be newly saved in the simple setting [LOAD*]. Check the current setting data before starting operation.

D. Reading the setting data saved with the [SAVE*] function


The setting data saved with the [SAVE*] function above can be read out with the following procedure (program mode [1]).

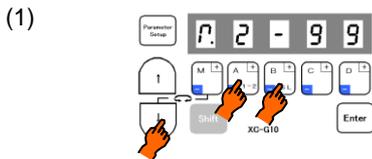


* Enter program mode [1]
([↓]+[A]+[B] key)

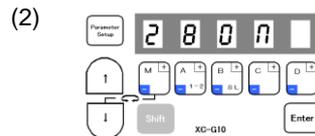


* Program mode [1] will be entered.

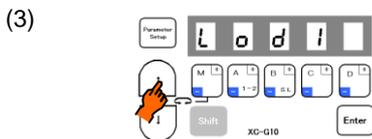

Press the [↑] key and set the function to [LOAD1].

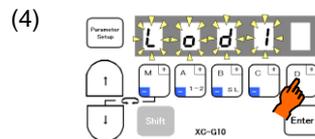

* When the [D] key is held down, [LOAD1] will flicker, and the loading process will be executed.

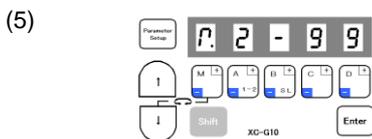

* Press [D] key (2 seconds or more) to return to the normal mode. (Process is completed)