

Easy Start-Sew



be improved by pressing the black button and lower the presser foot lever, making it parallel to the throat plate. This makes it easy to start sewing multiple layers of fabric or overlapped





The front drop-in bobbin is easy to view and replace with no separate bobbin case to lose or fuss with. The window in the hook cover allows you to monitor the remaining bobbin





As the needle stops at the lowest position, you can easily turn the material and begin to sew. By pushing the Reverse Stitch Button, the needle will go up and you can remove the material safely and effectively.

New Feature





Accessories such as presser foot or bobbins are easy to store in the auxiliary bed.



SPECIFICATIONS

HZL-E71

Sewing Speed	Max. 900r.p.m
Stitch Length	Max. 4mm
Zigzag Width	Max. 7mm
Lift of the presser foot	2 steps lifter Max. 12mm
Needle	HA×1(130/705H)#9~#16
Dimensions	410(W)×300(H)×180(D)mm
Weight (machine only)	7.3kg





SEWING PATTERNS

5**久**業 目 E 主 目 出 题 念 滚 冬 》 象 图 图 图 瓷 爻 类 》 ● ●) ■



Safety Instruction

To ensure proper and safe use of the machine, be sure to carefully read the "Instruction Manual" before operating the unit.



JUKI CORPORATION Household Sewing Machine Division 8-2-1 Kokuryo-cho, Chofu-shi, Tokyo 182-8655,Japan TEL:81-3-3480-5034 FAX:81-3-3480-5037 http://www.juki.co.jp E-mail:hsm@juki.co.jp


JUKI CORPORATION holds the rights to change technical specifications without prior notice.



50 Sewing Patterns and Many User Friendly Features



Stitch length and zigzag width can be easily changed to your preferred size by push button and adjustment lever. Your actual settings for stitch length and zigzag width are displayed at the LED indicator. You can return to the standard settings by simply pushing the one touch manual buttons

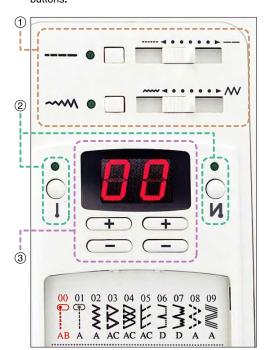

New Feature



Two Automatic Lock Stitch Keys

Push button selection of two different lock stitches to secure your sewing.

Reinforcement Stitch

The needle enters at the same position both at the beginning and end of sewing creating a reinforcement stitch that prevents stitches from fraying or unraveling.

Reverse Stitch

The machine automatically performs reverse stitching at the beginning and end of sewing.



Quad-Mode LED Indicator

Select your desired sewing pattern by entering the pattern number at the push button control panel. Each sewing pattern is clearly identified with large digits at the LED indicator. It will also display the operational status of the bobbin thread winder when the winding shaft is in the working position.







Determining the correct thread tension for the material you are sewing is easy with the conveniently located thread tension dial.

Lift of the Presser Foot




The presser foot lift raises in 2 steps with a maximum lift range of 12mm. Even heavy weight materials are easily handled in and out of the sewing area.

Drop Feed




You can lower the feed dog for free-motion quilting or raise it for normal sewing by simply moving the lever to the right or left.

Extra Feed Dog



Located in front of the needle entry hole, it enables you to start sewing smoothly and effortlessly.







The automatic needle threader easily threads the needle without eyestrain and allows you to start sewing quickly.

