



WHEN YOU PLACE ORDERS

Please note when placing orders, that the model name should be written as follows:

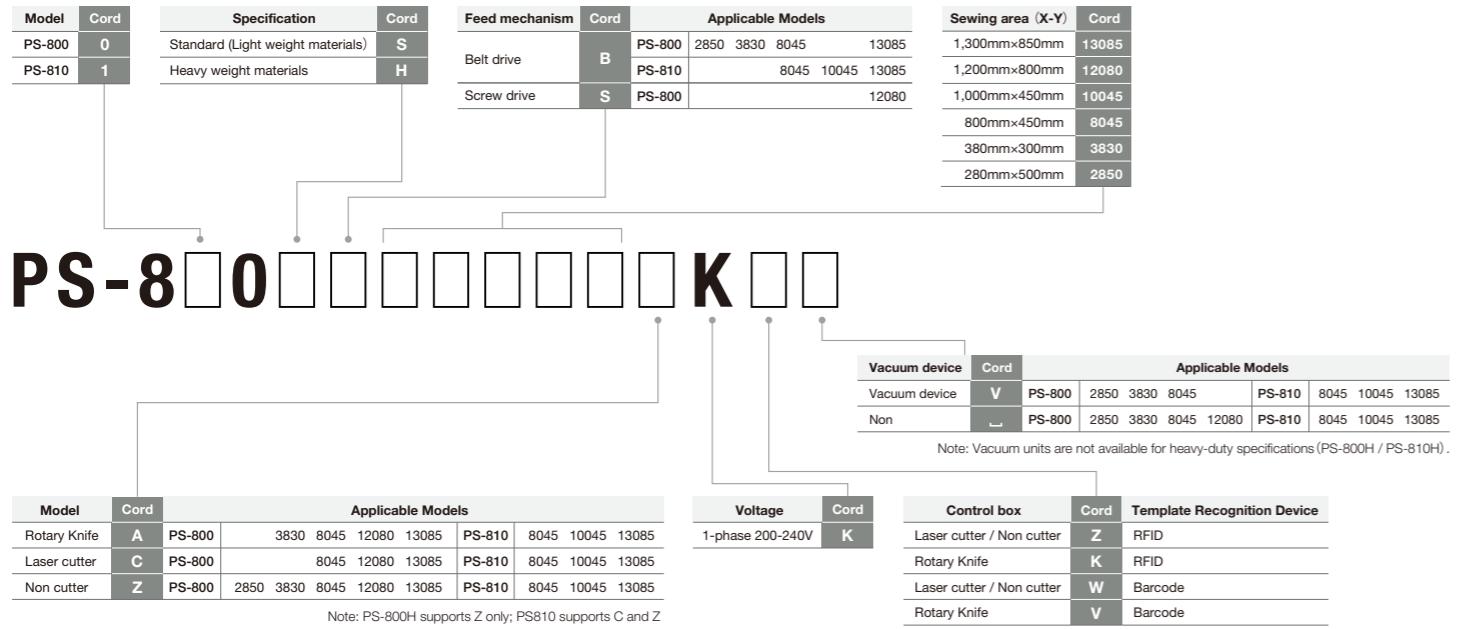

Note: Specifications not listed in the catalog can be accommodated in custom orders.

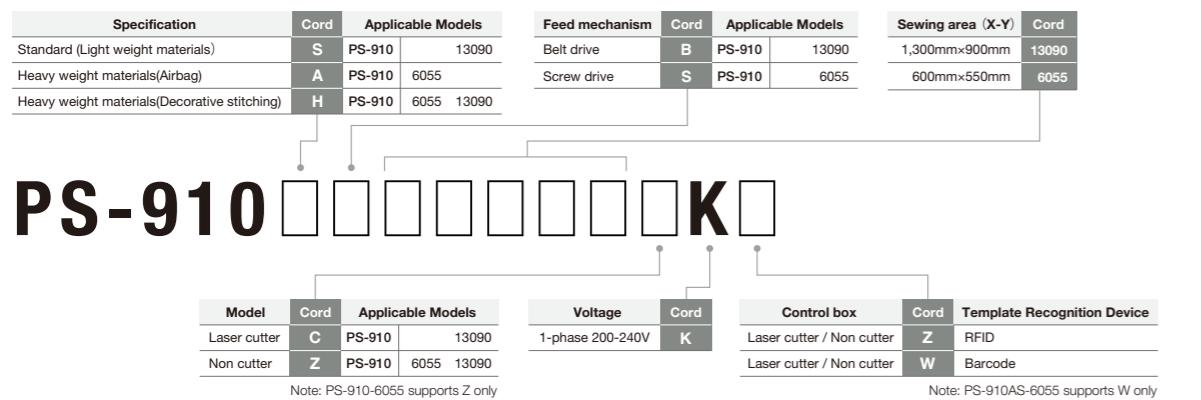

Note: Specifications not listed in the catalog can be accommodated in custom orders.

JUKI **JUKI CORPORATION**
SEWING BUSINESS UNIT

2-11-1, TSURUMAKI, TAMA-SHI, TOKYO 206-8551, JAPAN

PHONE: (81) 42-357-2355 FAX: (81) 42-357-2274

<https://www.juki.co.jp/en>

- Specifications and appearance may be changed without notice for improvement purposes.
- To ensure safe use, be sure to read the instruction manual before use.
- QR code is a registered trademark of DENSO WAVE INCORPORATED.



Registered Organization: JUKI CORPORATION Head Office
The Scope of the Registration: The activities of research, development, design, sales, distribution, and maintenance services of industrial sewing machines, household sewing machines and industrial robots, etc., including sales and maintenance services of data entry systems.

The information in this catalog is current as of January 2026. (Rev01) (JC)

Pattern Seamer

PS-910 Series

360° Head-Rotation Automatic Template Sewing Machine

PS-800 Series

Automatic Template Sewing Machine

PS-810 Series

Automatic Template Sewing Machine




Template sewing immediately transforms beginners into skilled operators and passes on sewing expertise into the future.

“Passing on skills that promise stable quality”


Human resource challenges such as declining operator skills and the retention of younger workers are becoming more severe every year. Many factories find it difficult to pass down expertise and maintain stable quality as a result.

The JUKI Pattern Seamer provides the technologies to fundamentally solve these issues and guide factories toward sustainable management.

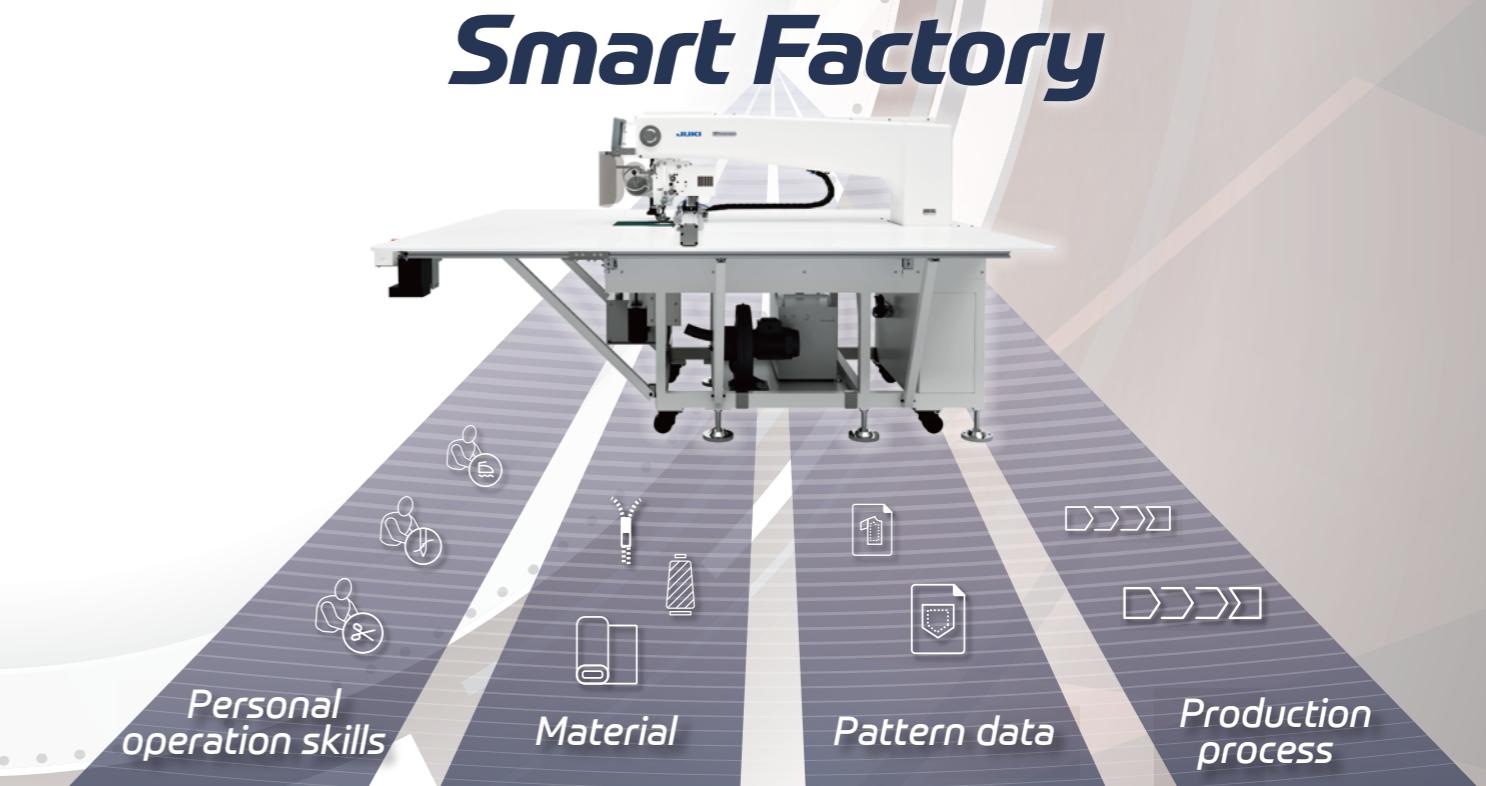

Building a production line where every operator becomes productive and begins contributing at once. The key is “Template sewing.”

Template sewing uses a template to replace operations previously performed by hand. A dedicated jig sews and cuts the fabric automatically based on a preset program. That is “Template sewing.”

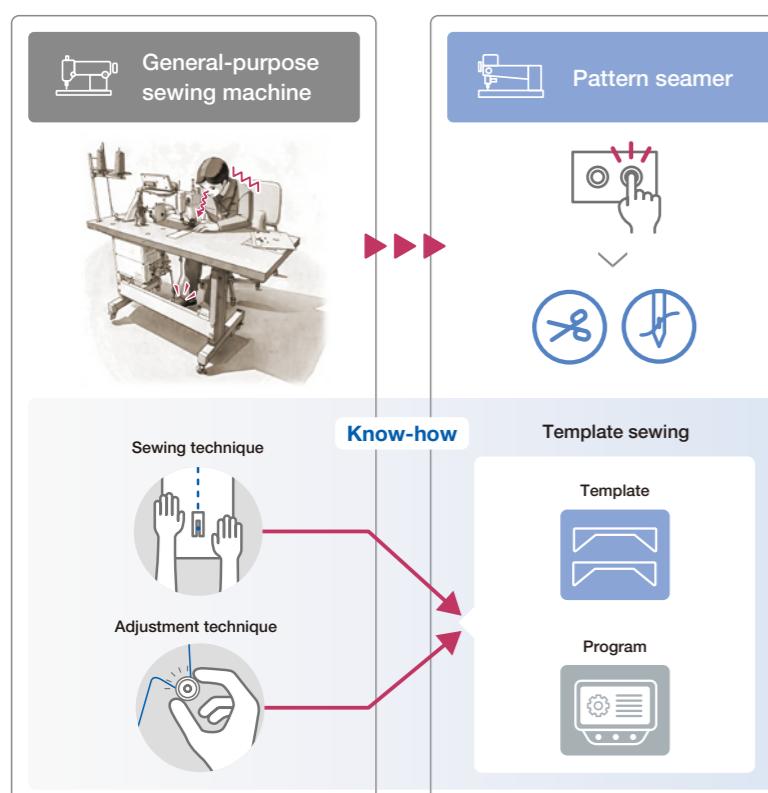

By designing and creating a template for every process and programming the corresponding sewing conditions, you create a system that gives every operator the power to reproduce expert-level skills and factory-specific know-how with the press of a button. Even a novice operator can handle multiple demanding processes without help from others, leading to significant labor savings.


More simply, template sewing shifts a factory away from production systems that depend on manpower and worker skills. The freedom this brings is the greatest value delivered by JUKI's Pattern Seamer.

Entering an era of template sewing where template engineers take center stage

JUKI Pattern Seamer combines a high-quality machine head with an extensive lineup of optional attachments—cutters, vacuum systems, and more—to sew, cut, press, and perform other operations continuously and automatically with a single machine.

Implementing this advanced level of template sewing requires the redesign of multiple processes that have traditionally been performed separately. The template engineers assigned to perform this essential task convert the expertise of skilled operators into systems that anyone can use. By enabling consistent quality, shorter training periods, and seamless skill transfer, they become the core personnel in sewing factories.

JUKI leverages the knowledge accumulated through its unique global network to support template creation and develop template engineers.

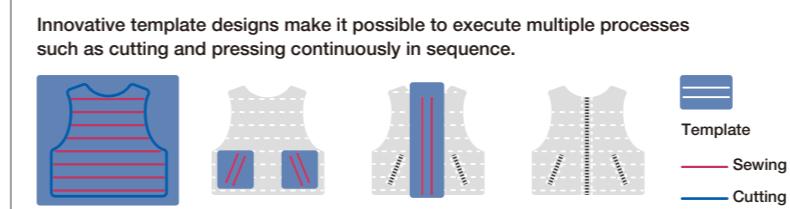

Template sewing dramatically improves production volume and productivity even when your factory faces staffing constraints.

Template sewing frees up the workforce manning a line by separating the operations of “fabric setting” and “sewing processing.” The machine no longer requires an operator constantly stationed by its side as it runs.

As staffing requirements become less constraining, manufacturers can more easily introduce the following types of automated and robotic operations into their lines:


- Transporting templates with the fabric already set
- Automated sewing by the pattern seamer

As the systems automate and reliance on manual labor dwindles, production volumes and productivity increase substantially across the entire line.



The JUKI-level standard
the world's factories have been waiting for.

The JUKI Pattern Seamer
transforms the industry.

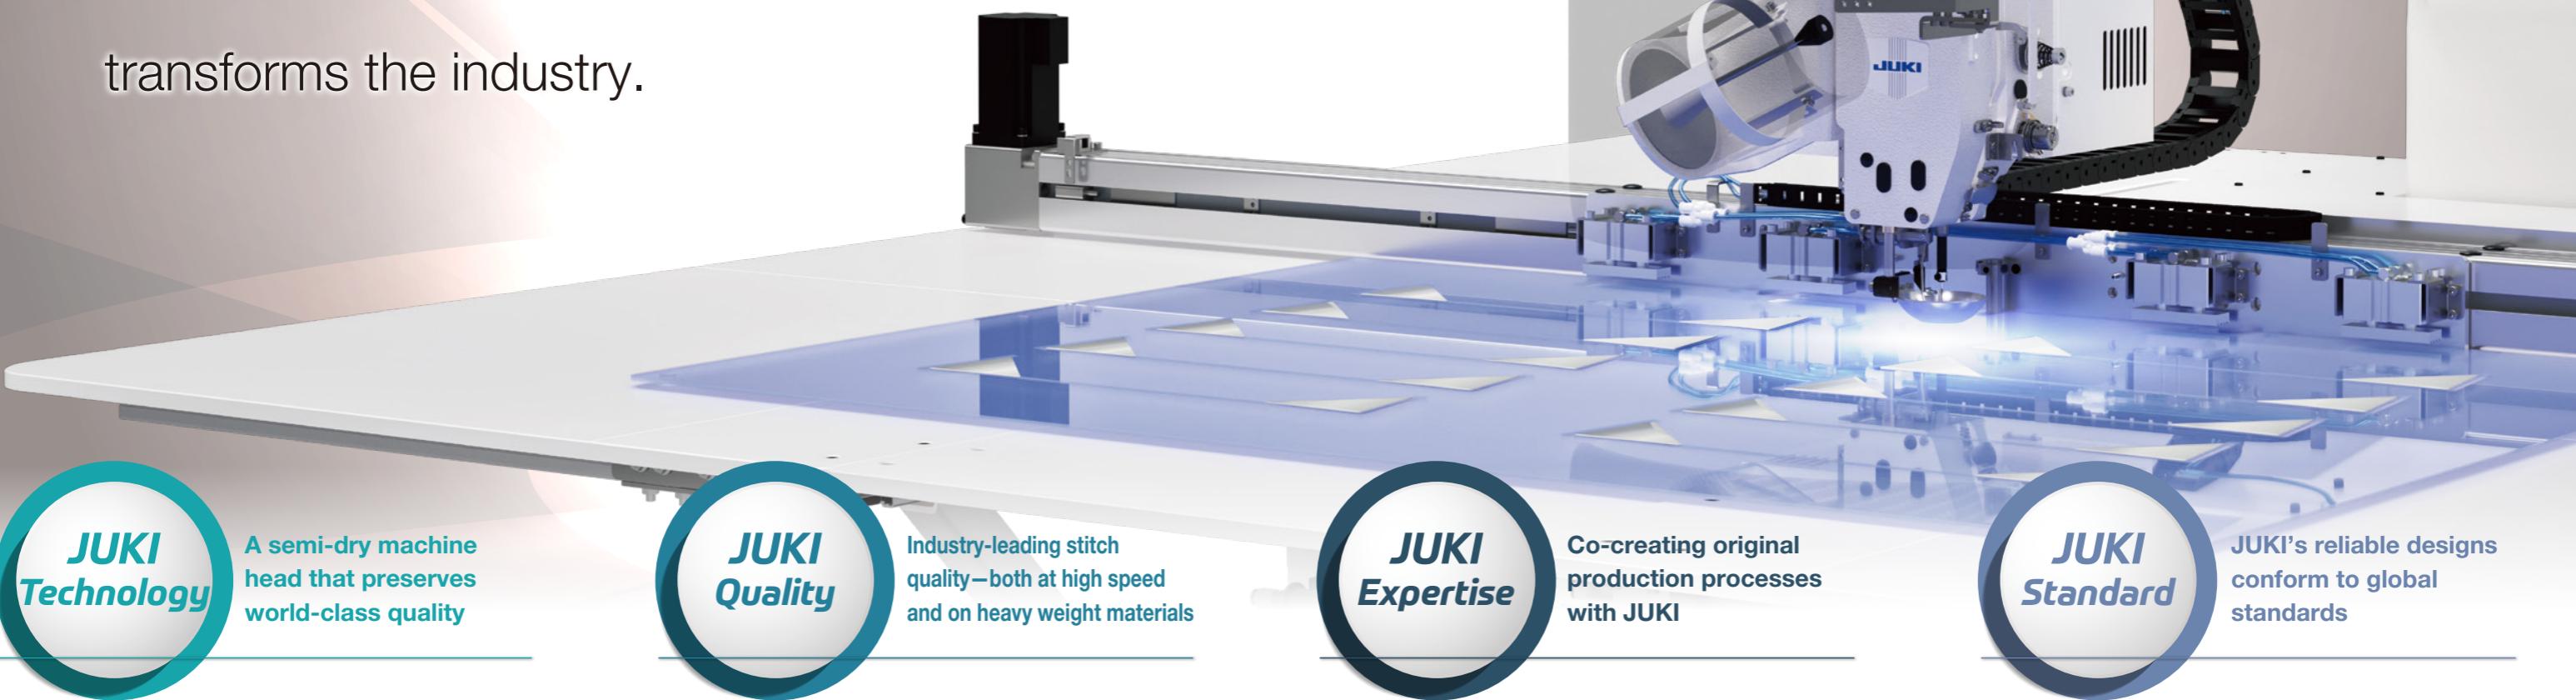

Perfect sewing safety with zero oil staining

All JUKI Pattern Seamer models adopt a semi-dry machine head structure in which oil is applied only to the hook section. The semi-dry configuration dramatically reduces the risk of oil stains, promising safe sewing even on down jackets, white fabrics, and other materials where oil stains easily spread and are highly noticeable.


Equipped with JUKI's signature frame structure and feed control technology

The highly rigid frame construction, optimized structural design, and feed control technology ensure exceptional needle entry accuracy even during high-speed sewing. (Models specified for lightweight materials are shipped with a thin #8 needle.) Beautiful feed pitch achieved. Attention to detail is the hallmark of JUKI Quality.

J-Dry Technology

JUKI Dry High-Speed Glide Technology

JUKI's unique design philosophy : not to shield oil, but to eliminate the need for it. The high-precision design and special surface treatments of the components reduce wear and extend the operation life by enabling oil-free lubrication.

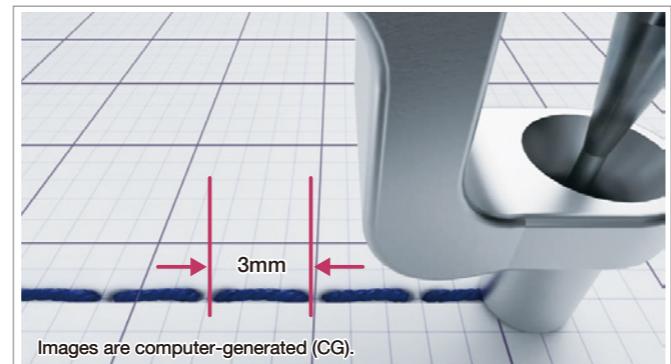

JUKI Expertise
Co-creating original production processes with JUKI

A comprehensive lineup of devices enabling optimal process designs

By leveraging our extensive lineup of equipment—including laser cutters and rotary knives—we enable optimal process design based on a clear vision of the ideal process. Working with JUKI's experienced engineers, customers can design and develop original, customized processes. For example, adopting a laser cutter prevents fraying at the cut edge and reduces downstream processes. Direct sewing after cutting simplifies fabric pattern alignment, streamlining production with fewer overall steps.

JUKI Standard
JUKI's reliable designs conform to global standards

Comprehensive compliance with the international regulations applied to radio waves, machinery, and lasers



JUKI Pattern Seamers are designed in accordance with global regulations and major international safety standards. JUKI's RFID systems satisfy the radio-wave regulations in each country, with machine bodies that incorporate ISO-compliant safety covers. Some of our laser cutters meet the DIN safety standards, among the strictest in the world.

Achieving a higher level of sewing quality

Programmed intermediate presser foot


Prevents stitch skipping and thread breakage when sewing multi-layer sections or fabrics of different thicknesses, even when using the same sewing pattern.

The lower dead point of the presser foot can be programmed for each stitch within the sewing pattern.

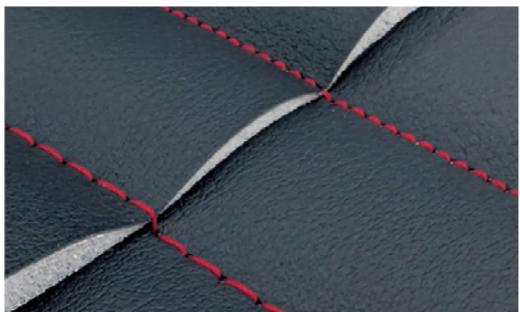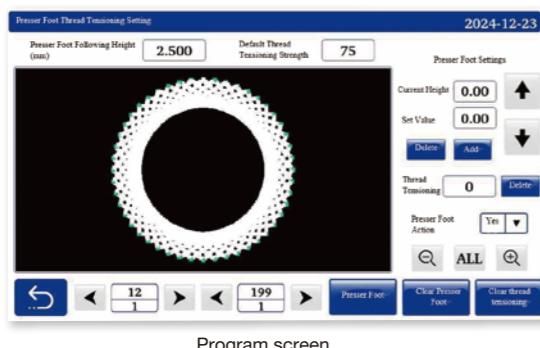


Sewing example

- Multi-layer section:
When the fabric thickness varies within the same process

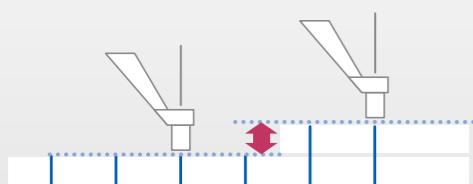

- When sewing fabrics of different thicknesses – even with the same sewing pattern

Process 1: Plain stitching Process 2: Hem stitching

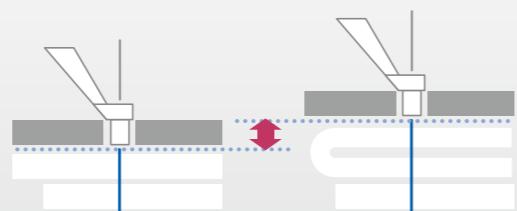

Automatic sewing program recognition

By reading the barcode/RFID embedded in the template, the corresponding sewing program can be called up.

Sewing patterns are automatically identified by means of RFID/Barcode reader to automatically call up the relevant sewing program, thereby starting sewing quickly.


* RFID (radio frequency identification): It is the technology to read and write data saved on IC chips through wireless non-contact transfer of radio frequency waves and is used to identify and manage products.



Active tension

The needle thread tension can be set for each stitch according to the sewing conditions within the program.

As the needle thread tension can be linked to the fabric thickness or adjusted according to the sewing direction, the program reproduces the optimal stitch quality and thread tension for any sewing application.

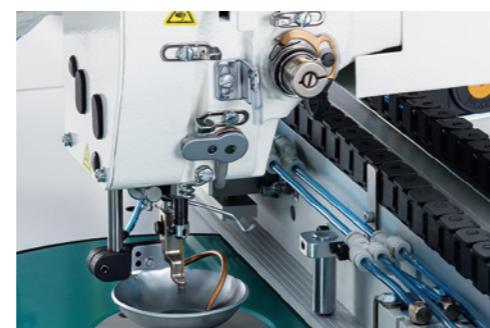

PS-910 Machine head rotation mechanism

The synchronized rotation of the machine head and hook achieves optical stitches in any direction.


The sewing direction is kept in a consistent orientation as the machine sews around curves, ensuring uniform stitch quality even across a full 360° circumference.



The machine sews continuously in every sewing direction, minimizing jump feed time and boosting productivity.

Sewing on a sewing machine with a non-rotating machine head


- Hitch stitches during sewing in some directions.
- The machine jump feeds to avoid hitch stitches.

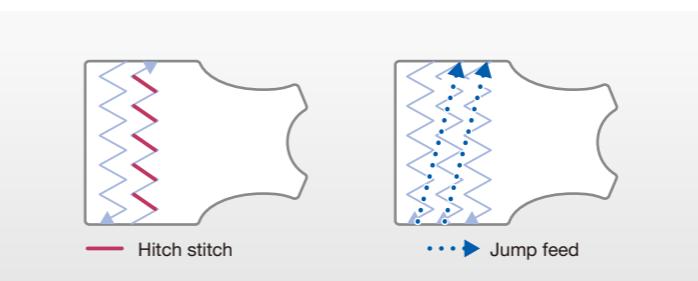

PS-800 Series

Sewing on a sewing machine with a rotating machine head

- No hitch stitches occur.
- Continuous sewing can be performed without causing jump feed.



PS-910 Series

What is a hitch stitch?

As the diagram shows, a hitch stitch occurs when the stitching angle progresses from 40° to 180° while the needle entry point stays positioned at the center.

Hitch stitching results in poor thread tension, degraded stitch appearance, and a higher risk of stitch skipping and other quality defects.

Characteristics of a perfect stitch (P) vs. hitch stitch (H)		
Stitch knotting	Sewing appearance	Characteristics
P Perfect stitch	 	<ul style="list-style-type: none"> • Stable sewing performance • Beautiful stitch appearance • Good thread tension
H Hitch stitch	 	<ul style="list-style-type: none"> • Significant loss of thread twist causes frequent sewing issues that destabilize sewing operation • Poor sewing appearance • Insufficient thread tension

Ideal custom processes with versatile equipment

Fabric cutting specification

The fabric can be cut while the template remains clamped.

Sewing and cutting can be performed while the fabric remains fixed to the template. Sewing, cutting, and subsequent sewing can also be carried out continuously with the template clamped in place.

This allows left and right garment panels to be cut and a zipper attached while fixed, enabling continuous processing and high-precision assembly with accurately aligned panels.

Rotary knife

Effective for creating soft cut edges on both straight and curved sections—ideal for garment parts that come into frequent contact with the skin.



Laser cutter

Capable of cutting a wide range of designs regardless of the fabric thickness or shape. Adjust the laser output and feed speed to perform edge finishing operations such as fray prevention while the machine cuts the fabric.



Laser smoke purification device

The laser cutter adopts a thermal cutting mechanism that may generate odors specific to the material as it cuts. In working environments with ductwork installed, the odors are discharged outside through the ducts. In environments without ductwork or with frequent changes in the production layout, comfort can be maintained by installing a purification device.


JUKI Singapore part number : L80-8910 1701M

Vacuum device

Makes it easy to set templates for soft knits and lightweight fabrics.

For knit products not suited to the pressing process, quality can be improved by using a vacuum device to form creases along the template before sewing.

In processes such as pocket attachment to dress shirts, creases can be formed along the template before the sewing begins. Manual folding with an iron-type folding process can therefore be eliminated, for improved productivity.

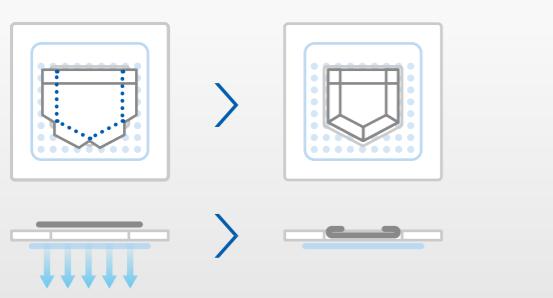

Independently driven electric bobbin winder

As the bobbin winding takes place independently from the machine, no operational stoppage is required. In addition, the winding amount can be set in meter units.

* Not included with the PS-800 2850 and PS-800 3830.



Sewing, cutting, and data editing—all in one machine

Operation panel

7-inch color LCD touch panel

Apart from basic machine operation, the operation panel can also be used to create sewing data and enter control commands.




Operation

To start, press either the start button on the operation switch or the green start button on the operation panel. Operation can be monitored in real time, as needed. Vacuum operation can be controlled independently with the pedal, enabling start-and-stop control.


Creating sewing/cutting data

The intuitive, icon-based interface simplifies data creation and modification, enabling the easy creation of programs. The settings can be easily adjusted while test stitching is underway.



Program (File) Selection

Up to 999 programs can be registered. Programs can be recalled not only by program number but also from a list of stitch patterns, allowing intuitive and efficient data selection.



Error message display

A numbered error message appears on the screen when an error occurs. Look up the corresponding number in the instruction manual to identify the error and the cause. Detailed solutions can be found in both the instruction manual and dedicated "ShuHari" app.

* For details on ShuHari, please refer to the "Introduction to the ShuHari Function".

Creating sewing data and entering control commands

Sewing data and control commands can be created and entered via the operation panel or through the editing software. (The editing software is included as standard.)

Procedure	Operation panel	Editing software	Function
CAD data import	<input checked="" type="radio"/>	<input type="radio"/>	CAD data import Data can be imported in DXF, AL, PLT, DST and several other formats.
Sewing data creation	<input type="radio"/>	<input checked="" type="radio"/>	Sewing data creation • Operation panel Place the template on the machine and create data while checking the actual item directly on-site. • Editing software Complex stitch shapes and cutting data can be easily converted into sewing data when design CAD data is available. Lines can be easily added or joined, and detailed stitch settings such as the sewing direction, sewing sequence, stitch length, reverse feed stitching, and condensation stitching can be configured in a few simple steps.
Control command input	<input checked="" type="radio"/>	<input type="radio"/>	Control command input Customize sewing data with control commands tailored to your application: change the intermediate presser foot height, needle thread tension, and sewing speed during sewing; add output control for optional devices; insert temporary retraction coordinates during sewing, and more.
Sewing data / control command editing	<input type="radio"/>	<input checked="" type="radio"/>	Sewing data/control command editing • Operation panel Once the template is set on the machine, you can edit the data as needed while checking the actual item. Add, move, or delete needle entry points; edit or remove existing control commands; insert new control commands. • Editing software Sewing data is saved in TZF format, enabling later revisions as needed.

- The operation panel is equipped with a standard USB port, allowing convenient software version upgrades and easy data management between machines.
- Created pattern data is saved in SLW format, enabling pattern sharing between machines.
- The panel's large-capacity memory can store up to 999 patterns.

Specification table

■ Feeding system		■ Cutting area									
(1) Belt drive type Maximum load capacity: 20.0 kg (template + workpiece)		Both the rotary knife and laser cutter can cut in areas separate from the sewing area.									
(2) Screw-drive type: PS-800-12080, PS-910-6055 Maximum load capacity: 25.0 kg (template + workpiece)		Sewing areas and specification combinations that are not listed in the specification table can be accommodated as customized specifications. For details, please contact a JUKI sales office.									
Model name	PS-910-6055	PS-910-13090	PS-800-2850	PS-800-3830	PS-800-8045	PS-800-12080	PS-800-13085	PS-810-8045	PS-810-10045		
Overall appearance : Sewing area		In-line type		In-line type		In-line type		In-line type			
 550 600mm×550mm 0 x 600 900 1300mm×900mm 0 x 1300		 500 280mm×500mm 0 x 280		 300 380mm×300mm 0 x 380		 450 800mm×450mm 0 x 800		 800 1200mm×800mm 0 x 1200		 850 1300mm×850mm 0 x 1300	
Sewing area		600mm×550mm	1,300mm×900mm	280mm×500mm	380mm×300mm	800mm×450mm	1,200mm×800mm	1,300mm×850mm	800mm×450mm	1000mm×450mm	1,300mm×850mm
Cutting area	Rotary knife	-	1090mm×860mm	-	365.5mm×256.5mm	699mm×393mm	1099mm×743mm	1199mm×793mm	699mm×393mm	899mm×399mm	1199mm×793mm
	Laser cutter	-	-	-	-	646mm×426mm	1046mm×776mm	1146mm×826mm	646mm×426mm	846mm×426mm	1146mm×826mm
	Vacuum area *2	-	-	290mm×280mm	290mm×280mm	332mm×332mm	-	-	432mm×432mm	432mm×432mm	432mm×432mm
	S spec	-	PS-910SB-13090ZKZ	PS-800SB-2850ZKZ	PS-800SB-3830ZKZ	PS-800SB-8045ZKZ	PS-800SS-12080ZKZ	PS-800SB-13085ZKZ	PS-810SB-8045ZKZ	PS-810SB-10045ZKZ	PS-810SB-13085ZKZ
	S spec + Laser	-	PS-910SB-13090ZKW	PS-800SB-2850ZKW	PS-800SB-3830ZKW	PS-800SB-8045ZKW	PS-800SS-12080ZKW	PS-800SB-13085ZKW	PS-810SB-8045ZKW	PS-810SB-10045ZKW	PS-810SB-13085ZKW
	S spec + Rotary knife	-	PS-910SB-13090CKZ	-	PS-800SB-8045CKZ	PS-800SB-12080CKZ	PS-800SS-12080CKZ	PS-800SB-13085CKZ	PS-810SB-8045CKZ	PS-810SB-10045CKZ	PS-810SB-13085CKZ
	S spec + Vacuum	-	PS-910SB-13090CKW	-	PS-800SB-8045CKW	PS-800SB-12080CKW	PS-800SS-12080CKW	PS-800SB-13085CKW	PS-810SB-8045CKW	PS-810SB-10045CKW	PS-810SB-13085CKW
	S spec + Laser + Vacuum	-	-	PS-800SB-3830AKK	PS-800SB-8045AKK	PS-800SS-12080AKK	PS-800SB-13085AKK	PS-810SB-8045AKK	PS-810SB-10045AKK	PS-810SB-13085AKK	
	Top : RFID Bottom : Barcode	S spec + Rotary knife + Vacuum	-	PS-800SB-2850ZKZV	PS-800SB-3830AKKV	PS-800SB-8045ZKZV	-	-	PS-810SB-8045ZKZV	PS-810SB-10045ZKZV	PS-810SB-13085ZKZV
	H spec	PS-910HS-6055ZKZ	PS-910HB-13090ZKZ	-	PS-800HB-3830ZKZ	PS-800HB-8045ZKZ	-	PS-800HB-13085ZKZ	PS-810HB-8045ZKZ	PS-810HB-10045ZKZ	PS-810HB-13085ZKZ
Model name	H spec + Laser	-	PS-910HB-6055ZKZ	PS-910HB-13090ZKW	-	PS-800HB-3830ZKW	PS-800HB-8045ZKW	-	PS-810HB-8045CKZ	PS-810HB-10045CKZ	PS-810HB-13085CKZ
	A spec	PS-910AS-6055ZKZ	-	-	-	-	-	-	-	-	-
Feed mechanism		Belt drive	Belt drive	Belt drive	Belt drive	Belt drive	Screw drive	Belt drive	Belt drive	Belt drive	Belt drive
Maximum sewing speed		3,000 sti/min *1 (Factory default settings: 1,800 sti/min)	3,000 sti/min *1 (Factory default settings: S spec: 2,800 sti/min) H spec: 1,800 sti/min)	3,500 sti/min *1 (Factory default settings: S spec: 2,800 sti/min) H spec: 1,800 sti/min)	3,000 sti/min *1 (Factory default settings: S spec: 2,800 sti/min) H spec: 1,800 sti/min)	3,000 sti/min *1 (Factory default settings: S spec: 2,800 sti/min) H spec: 1,800 sti/min)	3,000 sti/min *1 (Factory default settings: S spec: 2,800 sti/min) H spec: 1,800 sti/min)	3,000 sti/min *1 (Factory default settings: S spec: 2,800 sti/min) H spec: 1,800 sti/min)	3,000 sti/min *1 (Factory default settings: S spec: 2,800 sti/min) H spec: 1,800 sti/min)	3,000 sti/min *1 (Factory default settings: S spec: 2,800 sti/min) H spec: 1,800 sti/min)	3,000 sti/min *1 (Factory default settings: S spec: 2,800 sti/min) H spec: 1,800 sti/min)
Lubrication type		Semi-Dry(Needle bar dry)	Semi-Dry(Needle bar dry)	Semi-Dry(Needle bar dry)	Semi-Dry(Needle bar dry)	Semi-Dry(Needle bar dry)	Semi-Dry(Needle bar dry)	Semi-Dry(Needle bar dry)	Semi-Dry(Needle bar dry)	Semi-Dry(Needle bar dry)	Semi-Dry(Needle bar dry)
Stitch length		0.5 - 12.7 mm	0.5 - 12.7 mm	0.5 - 12.7 mm	0.5 - 12.7 mm	0.5 - 12.7 mm	0.5 - 12.7 mm	0.5 - 12.7 mm	0.1 - 12.7 mm	0.1 - 12.7 mm	0.1 - 12.7 mm
Hook		Full-Rotation double capacity hook	Full-Rotation double capacity hook	Full-Rotation standard hook	Full-Rotation double capacity hook	Full-Rotation double capacity hook	Full-Rotation double capacity hook	Full-Rotation double capacity hook	Full-Rotation double capacity hook	Full-Rotation double capacity hook	Full-Rotation double capacity hook
Intermediate presser foot lift & stroke		Lift amount:20mm Stroke:0~4mm	Lift amount:20mm Stroke:0~4mm	Lift amount:9mm Stroke:0~4mm	Lift amount:20mm Stroke:0~4mm	Lift amount:20mm Stroke:0~4mm	Lift amount:20mm Stroke:0~4mm	Lift amount:20mm Stroke:0~4mm	Lift amount:20mm Stroke:0~4mm	Lift amount:20mm Stroke:0~4mm	Lift amount:20mm Stroke:0~4mm
Variable lower dead point of the intermediate presser		0 - 9mm	0 - 9mm	0 - 4mm	0 - 9mm	0 - 9 mm	0 - 9 mm	0 - 9 mm	0 - 9 mm	0 - 9 mm	0 - 9 mm
Boat pressure lift		15mm	15mm	10mm	15mm	15mm	15mm	15mm	15mm	15mm	15mm
Needle bar stroke		40mm	40mm	30.7mm	39.5mm	39.5mm	39.5mm	39.5mm	39.5mm	39.5mm	39.5mm
Thread trimming type		Single-Blade rotary	Single-Blade rotary	Double-Blade rotary	Single-Blade rotary	Single-Blade rotary	Single-Blade rotary	Single-Blade rotary	Single-Blade rotary	Single-Blade rotary	Single-Blade rotary
Needle supplied at shipment		H spec:DP×17#21(#19~#23) A spec:DP×17#23(#23~#25)	S spec:BB×1 #8(#7~#12) H spec:DP×17 #21(#18~#23)	DB×1 #8(#7~#14)	S spec:DB×1 #8(#7~#14) H spec:DP×17 #21(#18~#23)	S spec:DB×1 #8(#7~#14) H spec:DP×17 #21(#18~#23)	S spec:DB×1 #8(#7~#14) H spec:DP×17 #21(#18~#23)	S spec:DB×1 #8(#7~#14) H spec:DP×17 #21(#18~#23)	S spec:DB×1 #8(#7~#14) H spec:DP×17 #21(#18~#23)	S spec:DB×1 #8(#7~#14) H spec:DP×17 #21(#18~#23)	S spec:DB×1 #8(#7~#14) H spec:DP×17 #21(#18~#23)
Template recognition function		RFID/Barcode	RFID/Barcode	RFID/Barcode	RFID/Barcode	RFID/Barcode	RFID/Barcode	RFID/Barcode	RFID/Barcode	RFID/Barcode	RFID/Barcode
Pattern data storage		Max 999 patterns (Up to 80,000 stitches per pattern)	Max 999 patterns (Up to 80,000 stitches per pattern)	Max 999 patterns (Up to 80,000 stitches per pattern)	Max 999 patterns (Up to 80,000 stitches per pattern)	Max 999 patterns (Up to 80,000 stitches per pattern)	Max 999 patterns (Up to 80,000 stitches per pattern)	Max 999 patterns (Up to 80,000 stitches per pattern)	Max 999 patterns (Up to 80,000 stitches per pattern)	Max 999 patterns (Up to 80,000 stitches per pattern)	Max 999 patterns (Up to 80,000 stitches per pattern)
Number of identification patterns		999 patterns	999 patterns	999 patterns	999 patterns	999 patterns	999 patterns	999 patterns	999 patterns	999 patterns	999 patterns
Program input method		USB	USB	USB	USB	USB	USB	USB	USB	USB	USB
Data format		Convert DXF / AI / PLT / DST formats to SLW format using editing software	Convert DXF / AI / PLT / DST formats to SLW format using editing software	Convert DXF / AI / PLT / DST formats to SLW format using editing software	Convert DXF / AI / PLT / DST formats to SLW format using editing software	Convert DXF / AI / PLT / DST formats to SLW format using editing software	Convert DXF / AI / PLT / DST formats to SLW format using editing software	Convert DXF / AI / PLT / DST formats to SLW format using editing software	Convert DXF / AI / PLT / DST formats to SLW format using editing software	Convert DXF / AI / PLT / DST formats to SLW format using editing software	Convert DXF / AI / PLT / DST formats to SLW format using editing software
JaNets		Connectable	Connectable	Connectable	Connectable	Connectable	Connectable	Connectable	Connectable	Connectable	Connectable
Weight		552Kg	Standard specification : 636kg	Standard specification : 220kg	Standard specification : 210kg	Standard specification : 305kg	Standard specification : 624.5kg	Standard specification : 500kg	Standard specification : 265kg	Standard specification : 275kg	Standard specification : 511kg
Power consumption		550VA	Standard:450VA Laser:1300VA	500VA	500VA	Standard:500VA Laser:1350VA Rotary knife:750VA	Standard:470VA Laser:1320VA Rotary knife:720VA	Standard:640VA Laser:1490VA Rotary knife:890VA	Standard:300VA Laser:1400VA Rotary knife:300VA	Standard:300VA Laser:1400VA Rotary knife:300VA	Standard:300VA Laser:1400VA Rotary knife:300VA
Air consumption		90L/min	90L/min	90L/min	90L/min	90L/min	90L/min	90L/min	90L/min	90L/min	90L/min
Power supply		Single-Phase 220V	Single-Phase 220V	Single-Phase 220V	Single-Phase 220V	Single-Phase 220V	Single-Phase 220V	Single-Phase 220V	Single-Phase 220V	Single-Phase 220V	Single-Phase 220V
Dimensions (table height)		1,400mm(W)×1,753mm(L)×830mm(H)	2,100mm(W)×2,326mm(L)×830mm(H)	1,060mm(W)×1,330mm(L)×830mm(H)	1,200mm(W)×1,020mm(L)×830mm(H)	1,200mm(W)×1,325mm(L)×830mm(H)	2,185mm(W)×2,180mm(L)×830mm(H)	2,100mm(W)×1,933mm(L)×830mm(H)	1,200mm(W)×1,325mm(L)×830mm(H)	1,400mm(W)×1,325mm(L)×830mm(H)	2,100mm(W)×2,193mm(L)×830mm(H)

*1: sti/min stands for Stitches per Minute.

* A water-circulation system cools the laser tube when the laser cutter is oper-

*2: Available as an optional retrofit.

* The PS-910-6055 (A specification) is started using two-hand operated switches. No start button can be found on the operation panel.

* The PS-910-6055 (H specification) is configured with a boat presser, while the PS-910-6055 (A specification) is not. The boat presser is available as an optional accessory for the A-specification models.

PS-800 Option list PS-800

PS-800 Exclusive options



Device	Part number	Functions and Benefits	
1 Active tension device	40228700	The needle thread tension can be set numerically on a per-stitch basis on the operation panel. Adjust the tension values according to variations in the fabric thickness and sewing direction to achieve highly consistent and reproducible sewing results.	
2 BK-8 Bobbin changer	40228699	The BK-8 bobbin changer replaces pre-set bobbin cases automatically, eliminating the time and productivity burdens of manual bobbin replacement. The cassette can store up to seven spare bobbins.	
3 Spare cassette for BK-8/BK-10	40207417	Spare cassette designed for use with the BK-8/BK-10 bobbin changer. With spare cassettes, the machine stays running while the bobbins load, for further reduced downtime.	
4 Vacuum device	40228476 (for PS-800-8045) 40286900 (for PS-800-3830) 40275338 (for PS-800-2850)	This device suctions fabrics while they are being set on the template. It enables the folding of soft and lightweight fabrics and improves productivity by eliminating processes such as pressing.	
5 Needle thread clamp unit	40315056	This device grips the tip of the needle thread after thread trimming to ensure that the needle thread and bobbin thread properly interlock at the start of the next stitch. * Cannot be used with a boat presser or wiper.	
6 Inverter clamp	40300389 (for PS-800-8045) 40300388 (for PS-800-3830) 40300668 (for PS-800-2850)	The inverter clamp performs especially well for perimeter stitching when attaching parts such as labels and hook-and-loop fasteners (Velcro). The clamp adopts a retractable presser foot to enable stitching close to the needle entry point, preventing fabric displacement and allowing uniform, stable edge-width stitching around the perimeter.	
7 Chucking device	40286901	The template-fixing process can now be performed with a sensor-equipped chucking device. The sensor guidance eliminates the risk of template damage caused by incorrect template installation. * This is an option for PS-800-3830.	
8 Third thread tension unit	40228696	Additional needle thread tension can be applied to the existing tension by toggling the third thread tension unit ON/OFF. Thread tension adjustments can now be performed when sewing multi-layer sections or when the sewing direction changes.	
9 Pen stick device	40228686	The pen stick device moves the pen up and down at predetermined timing to mark the sewn material, enabling positioning in downstream processes.	
10 Bird's nest prevention device	40228695	The bird's nest prevention device reduces bird's nesting on the reverse side of the fabric at the start of sewing by pulling the needle thread. The amount of thread pulled and the clamping force can be adjusted to suit the material used.	
11 Remaining bobbin thread detector	40228698	With a sensor to detect the length of bobbin thread remaining, the sewing machine stops when the preset length is reached. This eliminates garment defects caused by bobbin thread depletion, and even greater productivity gains can be achieved by using the detector in combination with a bobbin changer (BK-8).	
12 Template lift device	40239772	This device lifts the template from beneath the table, making it easier to set it into the clamping unit. The device is especially effective with large and heavy templates. * Standard equipment on models PS-800-13085 and P-800-12080. For PS-800-8045	
13 Counter knife reinforcing plate for heavy weight thread	40269240	This part prevents elastic deformation (deflection) of the counter knife when cutting heavy thread. It also improves cutting accuracy by preventing thick thread from escaping between the moving knife and counter knife.	
14 Moving knife for knit materials	40243631	This is a moving knife compatible with knit materials (soft and stretchable fabrics). It is especially useful when applying a stronger knife pressure than usual.	

PS-910 Option list PS-910

PS-900/910 Exclusive options



Device	Part number	Functions and Benefits	
1 BK-10 Bobbin changer	40270689	The BK-10 bobbin changer replaces pre-set bobbin cases automatically, eliminating the time and productivity burdens of manual bobbin replacement. The cassette can store up to seven spare bobbins.	
2 Needle thread clamp unit	40303744	This device grips the tip of the needle thread after thread trimming to ensure that the needle thread and bobbin thread properly interlock at the start of the next stitch. * Cannot be used with a boat presser or wiper.	
3 Barcode reader (*1)	40289310	This device reads the barcode attached to the template at a designated position. It prevents incorrect loading of sewing data.	
4 Thread trimmer driving cylinder unit	40291740	This device stabilizes the trimming of heavy thread when sewing thick materials. It ensures the smooth return of the moving knife by preventing heavy thread from getting caught between the moving knife and counter knife.	
5 Boat presser unit	40289312	This unit holds the template down with a boat presser to suppress material flutter and prevent sewing defects such as material misalignment and stitch skipping. * Standard equipment for PS-910-13090.	

*1: For PS-910

PS-810 Option list PS-810

PS-810

Device	Part number	Functions and Benefits	
1 Active tension device	40313814	The needle thread tension can be set numerically on a per-stitch basis on the operation panel. Adjust the tension values according to variations in the fabric thickness and sewing direction to achieve highly consistent and reproducible sewing results.	
2 BK-11 Bobbin changer	40313598 (for PS-810-8045/10045) 40313601 (for PS-810-13085)	The BK-11 bobbin changer replaces pre-set bobbin cases automatically, eliminating the time and productivity burdens of manual bobbin replacement. The cassette can store up to five spare bobbins.	
3 Spare cassette for BK-11	40228756	Spare cassette for use with the BK-11 bobbin changer. With spare cassettes, the machine stays running while the bobbins load, for further reduced downtime.	
4 Vacuum device	40313599 (for PS-810-8045/10045) 40313600 (for PS-810-13085)	This device suctions fabrics while they are being set on the template. It enables the folding of soft and lightweight fabrics and improves productivity by eliminating processes such as pressing.	
5 Needle thread clamp unit	40315056	This device grips the tip of the needle thread after thread trimming to ensure that the needle thread and bobbin thread properly interlock at the start of the next stitch. * Cannot be used with a boat presser or wiper. Dedicated software is separately required.	
6 Inverter clamp	40300389 (for PS-810-8045)	The inverter clamp performs especially well for perimeter stitching when attaching parts such as labels and hook-and-loop fasteners (Velcro). The clamp adopts a retractable presser foot to enable stitching close to the needle entry point, preventing fabric displacement and allowing uniform, stable edge-width stitching around the perimeter. * The PS-810 requires separate dedicated software.	
7 Third thread tension unit	40313596	Additional needle thread tension can be applied to the existing tension by toggling the third thread tension unit ON/OFF. Thread tension adjustments can now be performed when sewing multi-layer sections or when the sewing direction changes.	
8 Pen stick device	40313594	The pen stick device moves the pen up and down at predetermined timing to mark the sewn material, enabling positioning in downstream processes.	
9 Remaining bobbin thread detector	40313597	With a sensor to detect the length of bobbin thread remaining, the sewing machine stops when the preset length is reached. This eliminates garment defects caused by bobbin thread depletion, and even greater productivity gains can be achieved by using the detector in combination with a bobbin changer (BK-11).	
10 Counter knife reinforcing plate for heavy weight thread	40269240	This part prevents elastic deformation (deflection) of the counter knife when cutting heavy thread. It also improves cutting accuracy by preventing thick thread from escaping between the moving knife and counter knife.	
11 Moving knife for knit materials	40243631	This is a moving knife compatible with knit materials (soft and stretchable fabrics). It is especially useful when applying a stronger knife pressure than usual.	

Common options for all models PS-910 PS-800 PS-810


Device	Part number	Functions and Benefits	
1 Plastic bobbin (package of 10)	For 2-fold hook: 40244784 (blue) 40245125 (red) 40245137 (yellow)	The lighter weight of plastic bobbins compared to aluminum and steel types stabilizes stitching by reducing thread slack and idle rotation during intermittent sewing and after thread trimming. The plastic bobbins generate minimal friction inside the bobbin case and are about as durable as aluminum or steel. They come in three colors, making them useful for thread-count management. * For PS-800-2850 standard hook: 40244783 (blue), 40245124 (red), 40245136 (yellow)	
2 Thick material kit	40228701	The five parts included in this kit (intermediate presser foot D=3.5, needle hole guide D=3.0, thread tension (asm.), counter knife (heavy-duty), hook (heavy-duty)) are used to convert S-specification (thin-material) machines for the sewing of thick materials. The kit is provided as standard on H-specification (thick-material) machines.	
3 Hirose hook	S specification: 40302005 H specification: 40302006	This is a Japanese-made Hirose hook (S specification/H specification). The allowable needle-thread tension range is widened beyond that of the standard hook to prevent thread breakage (S specification) and eliminate balloon stitches (H specification).	
4 Needle guard hook	40273423	The needle guard prevents skipped stitches during the sewing of difficult materials by reducing needle deflection when the needle penetrates the material. * Applicable needle sizes are #7 to #11.	
5 Dry hook	40315264	A special carbon material is used on the race surface. The machine's semi-dry structure eliminates lubrication around the needle bar and thread take-up lever, and combining it with this dry hook enables fully oil-free sewing, including in the hook area. (Fully dry)	

*1: For PS-910



*1: For PS-910

Gauge

Needle plate

Reference diagram	Shape	Part number	Needle hole diameter	Protrusion height	A dimension	Remarks	Unit: mm
	With protrusion	40225495	Ø1.4	1.6	Ø5.0		
		40225504	Ø1.6	1.5	Ø3.7		
		40225486	Ø1.6	1.6	Ø6.0	S specification, supplied as standard	
		40225501	Ø2.0	1.6	Ø6.0		
		40225502	Ø2.2	1.6	Ø6.0		
		40225503	Ø2.4	1.6	Ø6.0		
	Without protrusion	40228744	Ø1.6	-	-		
		40225498	Ø2.4	-	-	H specification, supplied as standard	
		40225499	Ø3.0	-	-		
		40225495	Ø1.4	-	-		

Intermediate presser foot

Reference diagram	Shape	Size	Part number	Cylinder inner diameter (ØA)	Cylinder outer diameter (ØB)	Cylinder height (H)	Remarks	Unit: mm
	Cylindrical shape	-	40228073	Ø2.2	Ø3.6	5.2	S specification, supplied as standard	
			40228078	Ø2.2	Ø3.2	3.8		
			40228079	Ø2.2	Ø3.2	7.8		
			40228074	Ø2.7	Ø4.0	5.8		
			40228075	Ø3.5	Ø5.5	5.8	H specification, supplied as standard	
			40228077	Ø3.0	Ø4.4	4.6		
			40228076	Ø4.0	Ø5.5	5.8		
	Round shape	-	40225511	Ø2.0	Ø4.5	3.5		
			40225512	Ø2.5	Ø9.6	4.7		
			40225505	Ø2.5	Ø11.5	7.4		
			40313354	Ø1.8	Ø3.3	6.0		
			40313356	Ø1.8	Ø3.3	8.5		
			40313355	Ø2.0	Ø3.3	6.0		
			40313353	Ø2.0	Ø3.3	8.5		


Boat presser

Shape	Material	Size	Part number	Remarks
	Metal	Large	40225491	Supplied as standard No assembly part number
		Small	40225496	Assembly part number: 40228583 Includes screws, spring pins, and flat washers.
	Plastic	-	40225516	Assembly part number: 40228357 Includes screws, nuts, flat washers, and spring washers.

Needle bar


Part number	Remarks
40228113	Needle bar 1.6 (For DPx1, DPx5)
40228112	Needle bar 2.0 (For DPx17) * One piece is included as an accessory with S specification.

Template creation method

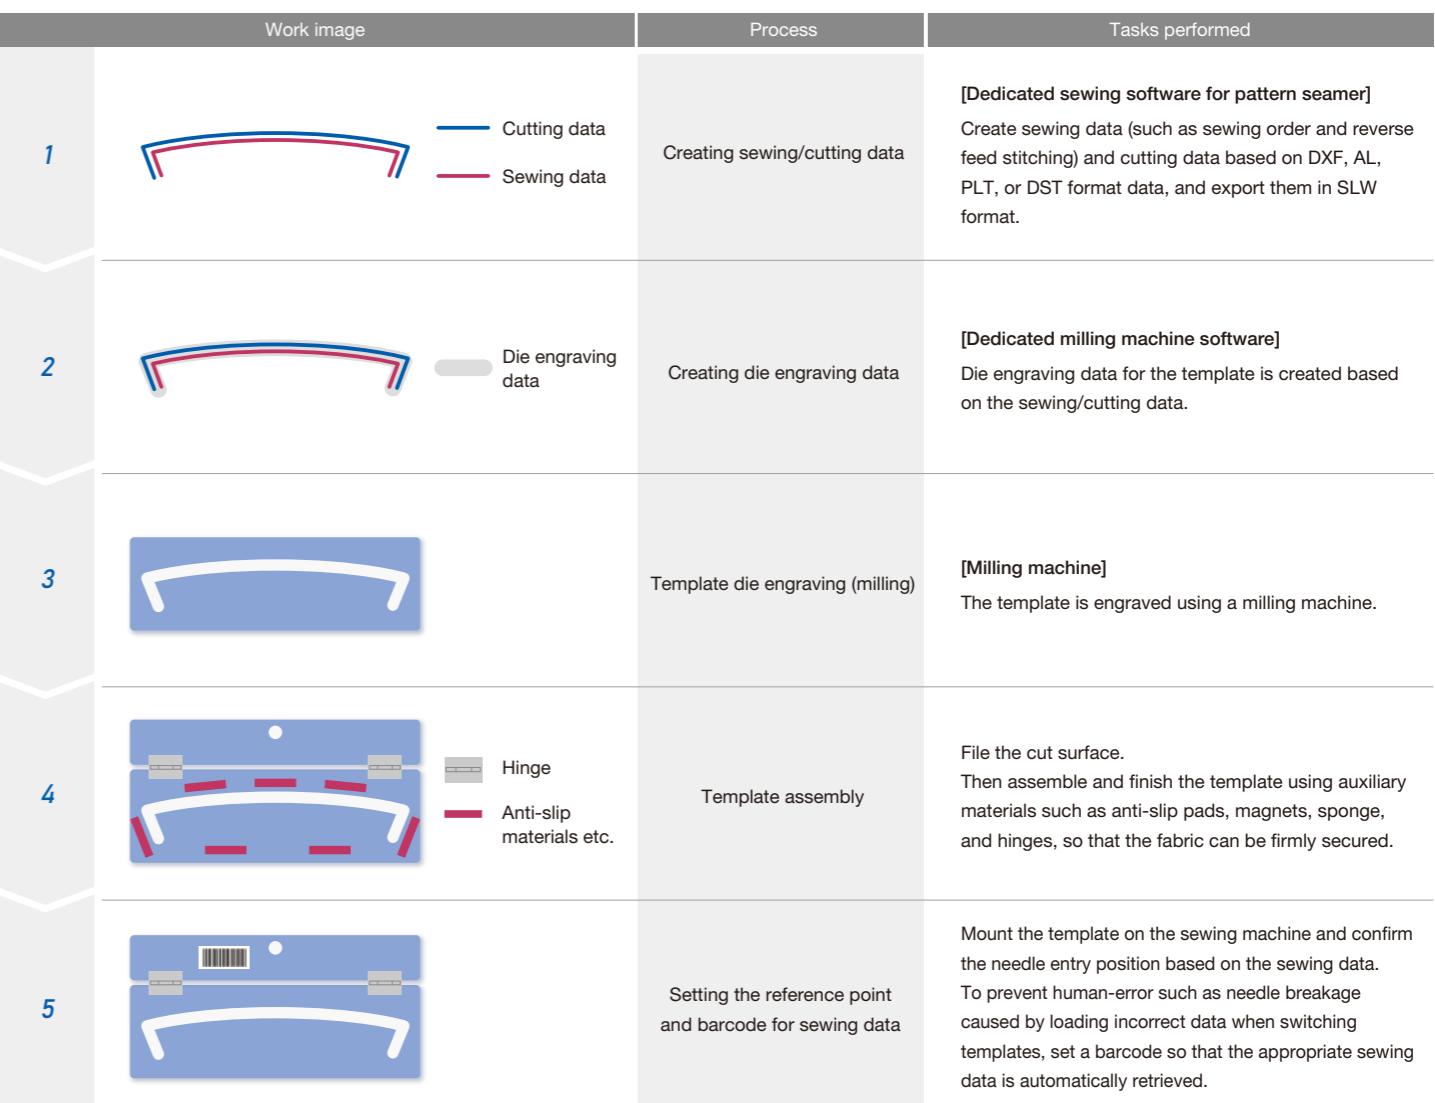

Comprehensive customization solutions





JUKI Pattern Seamer offers extensive customization options based on your specifications. For example, we provide solutions such as the "X88056," which supports everything from punching to sewing, and the fully automatic pocket setter "PS," equipped with pocket jigs tailored to your pocket size. For more details, please feel free to consult with your nearest JUKI representative.

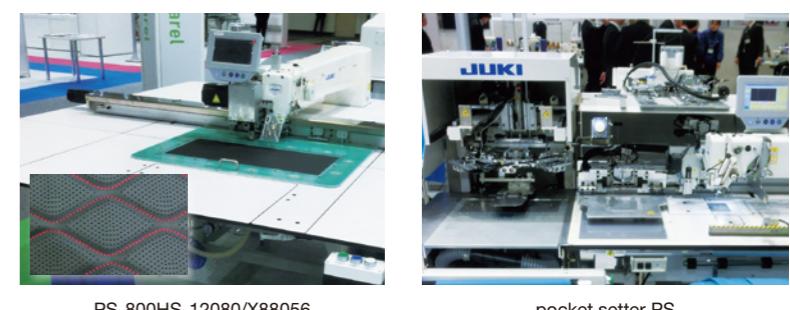

Parts for template production (Handled as JUKI Singapore products)

JUKI Singapore supplies various parts used in template production.

Part

	Name	JUKI Singapore part number	Explanation	Example of parts in use for template production (Handled as JUKI Singapore products)
Fabric fixing	1 Formwork clamp (with pins)	L80-5200 0390006	Used to secure fabric to the template. The pins used with the clamp help to hold the fabric in place more securely.	 <p>If the inner frame of the template aligns with the edge of the fabric to be placed, secure the fabric using formwork clamp 1 (with pins). While they help fix the fabric more securely, the pins of this clamp may also increase the risk of fabric damage. When securing more delicate or easily damaged fabrics, use formwork clamp 2 (without pins).</p> 
	2 Formwork clamp (without pins)	L80-5200 0390005	Used to secure fabric to the template. Effective when you want to fix fabric without damaging it.	 
	3 Clip	L80-5200 0390007	A variable-type clip that flexibly accommodates small-lot, multi-product production.	 <p>If the size of the inner frame of the template differs from that of the fabric to be placed, secure the fabric using clips 3. When the fabric to be sewn varies in size, clips 3 are effective as a flexible template solution.</p> 
	4 Positioning pin	L80-5200 0390025	Securely fixes fabric to the template while keeping it stretched.	 <p>Used when you need to securely fix the fabric to the template while keeping it stretched. As holes are pierced into the fabric to fasten it, the fabric must have sufficient material strength and have areas where holes can be made.</p> 
	5 Toggle clamp	L80-5200 0390002	Securely fixes the template and fabric.	 <p>Used when securely fixing the fabric to the template.</p> <p>(1) When securing the entire fabric by enclosing it with clamps (2) When holding only part of the fabric</p> 
Improved template operability	6 Hinge	L80-5200 0390016	Helps the template open and close more smoothly.	 <p>Used when creating open/close-type templates.</p> 
	7 Handle	L80-5200 0390026	Serves as a grip when opening and closing the template.	 <p>Used when attaching the handle to the upper template in open/close-type templates, or to facilitate handling and ease of setup when mounting non-open/close templates on the machine.</p> 
Improved sewing quality	8 Haircloth tape NEO-91-MWC-0014 (Adhesive horse haircloth) (35 mm x 20 m) (Roll)	NEO-91-MWC-0014	Attach haircloth tape to the template to help prevent puckering, fabric slippage, and fabric weave relaxation.	  <p>Used to continuously hold folded fabric by vacuum, or to lightly hold the fabric down while it is sewn.</p> 
	9 Anti-slip	G6343870000* (Sheet) 40066088* (10 mm Width Tape)	Attaching anti-slip sheets to the template helps prevent fabric slippage.	 <p>Used to guide the fabric around the perimeter to prevent it from shifting after it has been set in the template, or to guide it along the sewing direction to prevent fabric misalignment.</p> 

* JUKI part number

※ Parts not bearing a JUKI part number listed on this page are not genuine JUKI parts.

Formwork

Formwork name	JUKI Singapore part number	Size
Multi template 8045	L80-5200 0390017	80cm x 45cm
Multi template 12080	L80-5200 0390018-2	120cm x 80cm
Multi template 13085	L80-5200 0390018	130cm x 85cm

Quality improvement through template innovation


Enhance quality by refining the template design.

The application of haircloth tape is a good example. Attach haircloth tape to the template to help prevent puckering, fabric slippage, and fabric weave relaxation.

1 Make sure that the haircloth tape extends perpendicularly from the cut edge.



2 Sew the fabric together with the haircloth tape, using the tape to hold the fabric down.



Without countermeasures When fabric is held down with haircloth tape




Smarter maintenance with JUKI-ShuHaRi

The **JUKI-ShuHaRi** service supports sewing machine maintenance and solves issues at sewing sites with help from IoT devices such as smartphones and computers.

The functionality of the PS Series has been further enhanced with extensive content tailored to customer concerns.

Easy access to the information you need

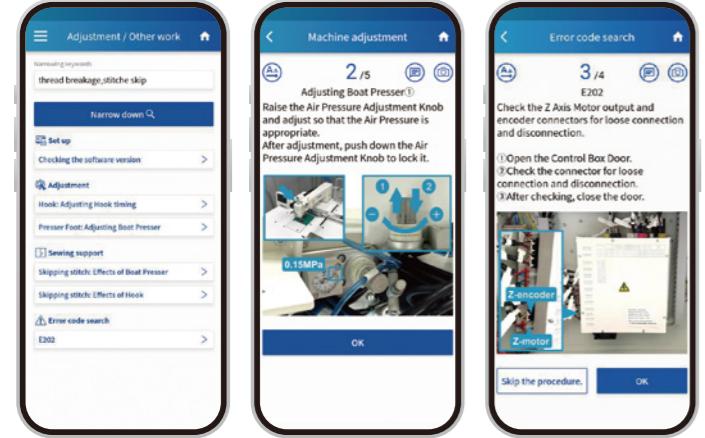

Search for the target information all at once using keywords.

In addition to the inspection items needed to ensure stable machine operation, a wide range of other information can also be easily found.

Setup

Check the necessary procedures for operating the sewing machine, including the tasks performed during machine setup.

Adjustment

Check the procedures for adjustments that affect sewing performance, such as hook timing.

Sewing support

Find solutions for sewing-related issues such as stitch skipping and thread breakage, as well as useful sewing advice.

Error code search

Look up inspection items and corrective actions based on the error codes displayed on the panel.

Equipment/Options


Check the procedures for installing optional parts and using the templates.

Information

Access helpful tips for resolving issues such as panel operation and machine troubleshooting.

Examples of template applications can also be easily viewed in ShuHaRi.

- Easily check template information for each sewing item and garment section.
- Watch actual sewing scenes on video to quickly grasp the concepts.

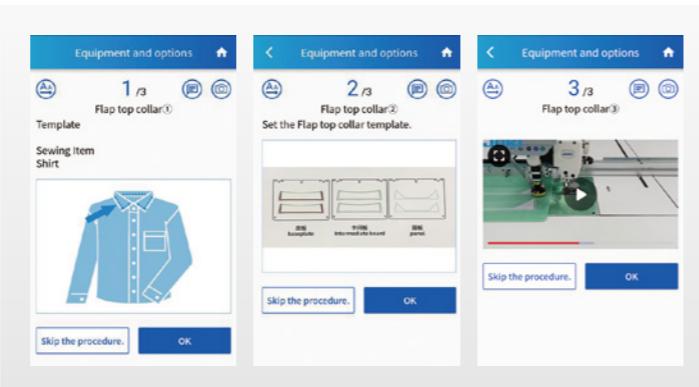

For more information about JUKI-ShuHaRi or to apply, please visit our official website.



JUKI-ShuHaRi application form

https://www.juki.co.jp/industrial_e/service_e/shuhari/form.php



JUKI-ShuHaRi app

Compatible with both iOS and Android devices

