

For 1-needle lockstitch sewing machine
with automatic thread trimmer

JUKI

JUKI Smart Solutions

Bird's nest prevention device

The quality of lockstitch at the start of sewing is improved.

It can be easily retrofitted and is effective for
“bird's nest prevention” at the start of lockstitch.

This is an optional device that can be retrofitted to prevent the “bird's nest” that occurs at the start of sewing in the thread trimming machine. The processing process such as thread trimming at the start of sewing part can be omitted, and productivity is improved. Since the needle thread after thread trimming is clamped, the start of sewing is stable even when sewing is started from the edge of the material.




Sample installation of bird's nest prevention device

By automatically grasping the needle thread at the start of sewing and realizing the optimum amount of needle thread, it is effective for not only “improvement of quality at the start of sewing” but also “bird's nest prevention”.

Length of remaining thread is 3 mm or less!!

● Examples of sewing from the edge of fabric

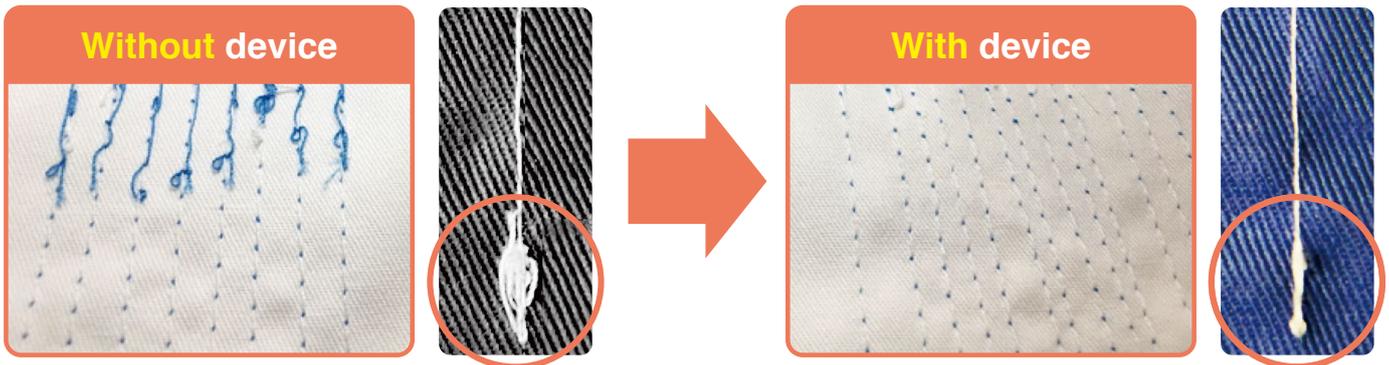

Standard accessory

<p>① Thread tension regulator</p> 	<p>② Needle thread clamp unit Thread tension</p> <p>There are 2 types of installation</p> <p>Side mounted type</p>  <p>Backhold type</p> 	<p>③ Control box & Dust collection box</p> 
--	---	---

This device can be used in a variety of processes.



LABEL



ZIPPER



POCKET



SHIRTS
BOTTOM



SLEEVE
TOPSTITCH



JEANS ZIPPER
TOP STITCH

Introduction of Optional Presser foot for Bird's nest prevention device

Attached as standard equipment




Standard presser foot

Option

Presser foot with moving guide (left of right)

< Size >
1/32, 1/16, 1/8, 1/4

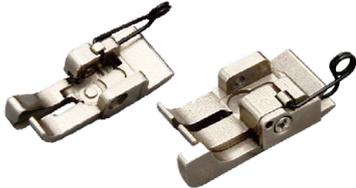


Presser foot with fixed guide (left or right)

< Size >
1/32, 1/16, 3/16, 1/8, 1/4




Replacing a foot can be very easy.

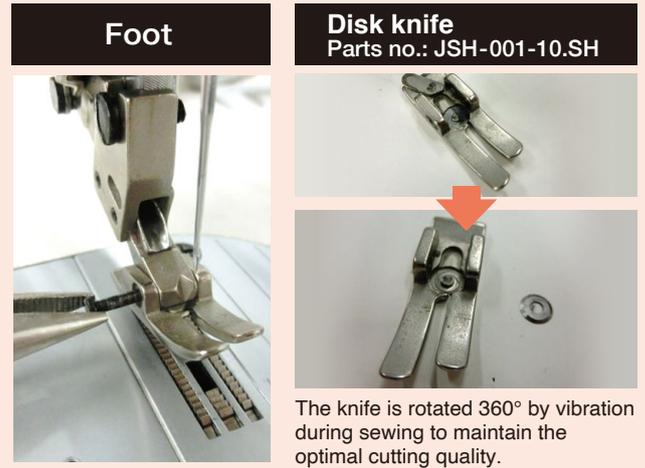

List of Optional presser foot for Bird's nest prevention device

No.	PART No.	DESCRIPTION	SIZE				
			X	X1	X2	X3	Y
1	JSH-001-11A	Flat presser(Standard Presser Foot)	11.2	2.0	-	-	4.4
2	JSH-001R1-4	Presser foot with fixed guide(1/4,right)	15.8	2.0	6.4	9.2	4.45
3	JSH-001R1-8	Presser foot with fixed guide(1/8,right)	12.8	2.0	3.2	6.6	4.45
4	JSH-001R3-16	Presser foot with fixed guide(3/16,right)	15.8	2.0	4.8	9.2	4.45
5	JSH-001L1-4	Presser foot with fixed guide(1/4,left)	15.8	2.0	6.4	9.2	4.45
6	JSH-001L1-8	Presser foot with fixed guide(1/8,left)	12.8	2.0	3.2	6.2	4.45
7	JSH-001L3-16	Presser foot with fixed guide(3/16,left)	15.8	2.0	4.8	9.2	4.45
8	JSH-001R1-16	Presser foot with fixed guide(1/16,right)	12.8	2.0	1.6	6.6	4.45
9	JSH-001L1-16	Presser foot with fixed guide(1/16,left)	12.8	2.0	1.6	6.2	4.45
10	JSH-001R1-32	Presser foot with fixed guide(1/32,right)	12.8	1.8	0.8	6.6	4.45
11	JSH-001L1-32	Presser foot with fixed guide(1/32,left)	12.8	1.8	0.8	6.2	4.45
12	JSH-001AR1-16	Presser foot with moving guide(1/16,right)	12.6	2.0	-	4.0	4.8
13	JSH-001AR1-32	Presser foot with moving guide(1/32,right)	12.6	2.0	-	4.0	4.8
14	JSH-001AL1-16	Presser foot with moving guide(1/16,left)	12.6	2.0	-	4.0	4.8
15	JSH-001AL1-32	Presser foot with moving guide(1/32,left)	12.6	2.0	-	4.0	4.8
16	JSH-001AR1-4	Presser foot with moving guide(1/4,right)	15.7	2.0	6.4	9.4	4.8
17	JSH-001AR1-8	Presser foot with moving guide(1/8,right)	14.6	2.0	3.2	8.2	4.8
18	JSH-001AR3-16	Presser foot with moving guide(3/16,right)	15.7	2.0	4.8	7.8	4.8
19	JSH-001AL1-4	Presser foot with moving guide(1/4,left)	15.7	2.0	6.4	9.4	4.8
20	JSH-001AL1-8	Presser foot with moving guide(1/8,left)	14.6	2.0	3.2	8.2	4.8
21	JSH-001AL3-16	Presser foot with moving guide(3/16,left)	15.7	2.0	4.8	7.8	4.8

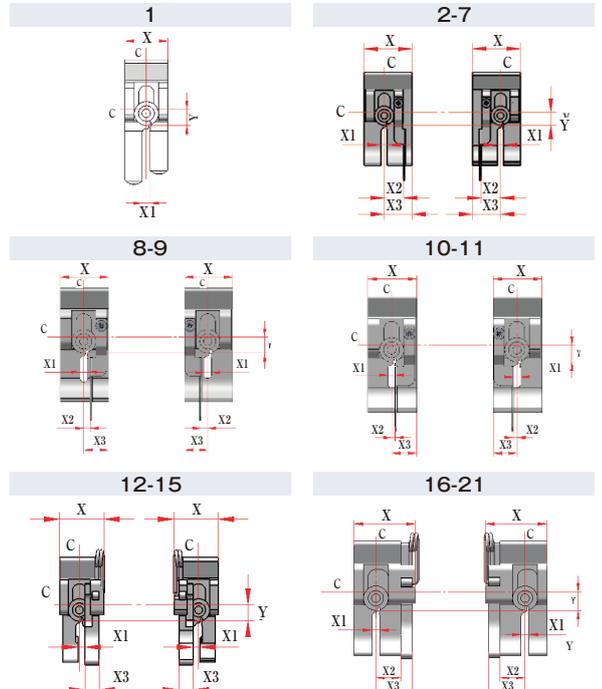

Applicable models & Device part No.

Applicable models	Device part No.	
	Side mounted	Backhold
DDL-9000C-F	-	
DDL-9000C-S / DDL-9000B	JSH-PBNS01	JSH-PBNB01
DDL-900B / DDL-900BB / DDL-900A		
DDL-8700-7 / DDL-8700B-7 / DDL-8100B-7		
DDL-7000A		
DDL-8000A	JSH-8000APBNS01	JSH-8000APBNB01
DDL-900C	JSH-900CPFUS-00/J	

* Since the device for DDL-8000A, DDL-900C can be directly used only by connecting to the sewing machine control box, no dedicated control box is included.



Registered Organization: JUKI CORPORATION Head Office
The Scope of the Registration: The activities of research, development, design, sales, distribution, and maintenance services of industrial sewing machines, household sewing machines and industrial robots, etc., including sales and maintenance services of data entry systems.



2-11-1, TSURUMAKI, TAMA-SHI,
TOKYO 206-8551, JAPAN
PHONE: (81) 42-357-2360
FAX: (81) 42-357-2380
<https://www.juki.co.jp/en>

* Specifications and appearance are subject to change without prior notice for improvement.
* Read the instruction manual before putting the machine into service to ensure safety.
* This catalogue prints with environment-friendly soyink on recycle paper.
* Paper from responsible sources FSC™ C001712