

***ENGLISH***

**PS-800-8045  
CAUTIONS FOR SAFETY**

# TO ENSURE SAFE USE OF YOUR SEWING MACHINE

For the sewing machine, automatic machine and ancillary devices (hereinafter collectively referred to as "machine"), it is inevitable to conduct sewing work near moving parts of the machine. This means that there is always a possibility of unintentionally coming in contact with the moving parts. Operators who actually operate the machine and maintenance personnel who are involved in maintenance and repair of the machine are strongly recommended to carefully read to fully understand the following **SAFETY PRECAUTIONS** before using/maintaining the machine. The content of the **SAFETY PRECAUTIONS** includes items which are not contained in the specifications of your product.

The risk indications are classified into the following three different categories to help understand the meaning of the labels. Be sure to fully understand the following description and strictly observe the instructions.

## (I) Explanation of risk levels

	<b>DANGER :</b> This indication is given where there is an immediate danger of death or serious injury if the person in charge or any third party mishandles the machine or does not avoid the dangerous situation when operating or maintaining the machine.
	<b>WARNING :</b> This indication is given where there is a potentiality for death or serious injury if the person in charge or any third party mishandles the machine or does not avoid the dangerous situation when operating or maintaining the machine.
	<b>CAUTION :</b> This indication is given where there is a danger of medium to minor injury if the person in charge or any third party mishandles the machine or does not avoid the dangerous situation when operating or maintaining the machine.
	Items requiring special attention.

## (II) Explanation of pictorial warning indications and warning labels

Pictorial warning indication		There is a risk of injury if contacting a moving section.	Pictorial warning indication		Be aware that holding the sewing machine during operation can hurt your hands.
		There is a risk of electrical shock if contacting a high-voltage section.			There is a risk of entanglement in the belt resulting in injury.
		There is a risk of a burn if contacting a high-temperature section.			There is a risk of injury if you touch the button carrier.
		Be aware that eye deficiency can be caused by looking directly at the laser beam.	Indication label		The correct direction is indicated.
		There is a risk of contact between your head and the sewing machine.			Connection of a earth cable is indicated.

Warning label			
	<p>① • There is the possibility that slight to serious injury or death may be caused. • There is the possibility that injury may be caused by touching moving part.</p> <p>② • To perform sewing work with safety guard. • To perform sewing work with safety cover. • To perform sewing work with safety protection device.</p> <p>③ • Be sure to turn the power OFF before carrying out "machine-head threading", "needle changing", "bobbin changing" or "oiling and cleaning".</p>		
Electrical-shock danger label			
	<p><b>危険</b> 高電圧部分に触れて、大けがをすることがある。 電源を切って、5分以上たってからカバーをはずすこと。</p> <p><b>DANGER</b> Hazardous voltage will cause injury. Turn off main switch and unplug power cord and wait at least 5 minutes before opening this cover.</p>		

# SAFETY PRECAUTIONS

Accident means "to cause personal injury or death or damage to property."



## DANGER

1. When it is necessary to open the control box containing electrical parts, be sure to turn the power off and wait for five minutes or more before opening the cover in order to prevent accident leading to electrical shock.



## CAUTION

### Basic precaution

1. Be sure to read the instruction manual and other explanatory documents supplied with accessories of the machine before using the machine. Carefully keep the instruction manual and the explanatory documents at hand for quick reference.
2. The content of this section includes items which are not contained in the specifications of your product.
3. Be sure to wear safety goggles to protect against accident caused by needle breakage.
4. Those who use a heart pacer have to use the machine after consultation with a medical specialist.

### Safety devices and warning labels

1. Be sure to operate the machine after verifying that safety device(s) is correctly installed in place and works normally in order to prevent accident caused by lack of the device(s).
2. If any of the safety devices is removed, be sure to replace it and verify that it works normally in order to prevent accident that can result in personal injury or death.
3. Be sure to keep the warning labels adhered on the machine clearly visible in order to prevent accident that can result in personal injury or death. If any of the labels has stained or come unstuck, be sure to change it with a new one.

### Application and modification

1. Never use the machine for any application other than its intended one and in any manner other than that prescribed in the instruction manual in order to prevent accident that can result in personal injury or death. JUKI assumes no responsibility for damages or personal injury or death resulting from the use of the machine for any application other than the intended one.
2. Never modify and alter the machine in order to prevent accident that can result in personal injury or death. JUKI assumes no responsibility for damages or personal injury or death resulting from the machine which has been modified or altered.

### Education and training

1. In order to prevent accident resulting from unfamiliarity with the machine, the machine has to be used only by the operator who has been trained/educated by the employer with respect to the machine operation and how to operate the machine with safety to acquire adequate knowledge and operation skill. To ensure the above, the employer has to establish an education/training plan for the operators and educate/train them beforehand.

### Items for which the power to the machine has to be turned off

Turning the power off: Turning the power switch off, then removing the power plug from the outlet.  
This applies to the following.

1. Be sure to immediately turn the power off if any abnormality or failure is found or in the case of power failure in order to protect against accident that can result in personal injury or death.
2. To protect against accident resulting from abrupt start of the machine, be sure to carry out the following operations after turning the power off. For the machine incorporating a clutch motor, in particular, be sure to carry out the following operations after turning the power off and verifying that the machine stops completely.
  - 2-1. For example, threading the parts such as the needle, looper, spreader etc. which have to be threaded, or changing the bobbin.
  - 2-2. For example, changing or adjusting all component parts of the machine.
  - 2-3. For example, when inspecting, repairing or cleaning the machine or leaving the machine.
3. Be sure to remove the power plug by holding the plug section instead of the cord section in order to prevent electrical-shock, earth-leakage or fire accident.
4. Be sure to turn the power off whenever the machine is left unattended between works.
5. Be sure to turn the power off in the case of power failure in order to prevent accident resulting of breakage of electrical components.

# **PRECAUTIONS TO BE TAKEN IN VARIOUS OPERATION STAGES**

## **Transportation**

1. Be sure to lift and move the machine in a safe manner taking the machine weight in consideration. Refer to the text of the instruction manual for the mass of the machine.
2. Be sure to take sufficient safety measures to prevent falling or dropping before lifting or moving the machine in order to protect against accident that can result in personal injury or death.
3. Once the machine has been unpacked, never re-pack it for transportation to protect the machine against breakage resulting from unexpected accident or dropping.

## **Unpacking**

1. Be sure to unpack the machine in the prescribed order in order to prevent accident that can result in personal injury or death. In the case the machine is crated, in particular, be sure to carefully check nails. The nails have to be removed.
2. Be sure to check the machine for the position of its center of gravity and take it out from the package carefully in order to prevent accident that can result in personal injury or death.

## **Installation**

### **(I) Table and table stand**

1. In order to prevent accidents causing injury or death, be sure to use the specified table stand components. In the case it is unavoidable to use any unspecified table stand components, be sure to use those that are able to adequately withstand the machine weight and the reactive force during operation.
2. If casters are fitted to the table stand, be sure to use the casters with a locking mechanism and lock them to secure the machine during the operation, maintenance, inspection and repair in order to prevent accident that can result in personal injury or death.

### **(II) Cable and wiring**

1. Be sure to prevent an extra force from being applied to the cable during the use in order to prevent electrical-shock, earth-leakage or fire accident. In addition, if it is necessary to cable near the operating section such as the V-belt, be sure to provide a space of 30 mm or more between the operating section and the cable.
2. Be sure to avoid starburst connection in order to prevent electrical-shock, earth-leakage or fire accident.
3. Be sure to securely connect the connectors in order to prevent electrical-shock, earth-leakage or fire accident. In addition, be sure to remove the connector while holding its connector section.

### **(III) Grounding**

1. Be sure to have an electrical expert install an appropriate power plug in order to prevent accident caused by earth-leakage or dielectric strength voltage fault. In addition, be sure to connect the power plug to the grounded outlet without exceptions.
2. Be sure to ground the earth cable in order to prevent accident caused by earth leakage.

### **(IV) Motor**

1. In order to prevent accidents due to burning, be sure to use a motor with rated capacity (specified product).
2. If a commercially available clutch motor is used with the machine, be sure to select one with an entanglement preventive pulley cover in order to protect against being entangled by the V-belt.

## **Before operation**

1. Be sure to make sure that the connectors and cables are free from damage, dropout and looseness before turning the power on in order to prevent accident resulting in personal injury or death.
2. Never put your hand into the moving sections of the machine in order to prevent accident that can result in personal injury or death.  
In addition, check to be sure that the direction of rotation of the pulley agrees with the arrow shown on pulley.
3. If the table stand with casters is used, be sure to secure the table stand by locking the casters or with adjusters, if provided, in order to protect against accident caused by abrupt start of the machine.

## **During operation**

1. Be sure not to put your fingers, hair or clothing close to the moving sections such as the handwheel, hand pulley and motor or place something near those sections while the machine is in operation in order to prevent accident caused by entanglement that can result in personal injury or death.
2. Be sure not to place your fingers near the surround area of the needle or inside the thread take-up lever cover when turning the power on or while the machine is in operation in order to prevent accident that can result in personal injury or death.
3. The machine runs at a high speed. Never bring your hands near the moving sections such as looper, spreader, needle bar, hook and cloth trimming knife during operation in order to protect your hands against injury. In addition, be sure to turn the power off and check to be sure that the machine completely stops before changing the thread.
4. Be careful not to allow your fingers or any other parts of your body to be caught between the machine and table when removing the machine from or replacing it on the table in order to prevent accident that can result in personal injury or death.

5. Be sure to turn the power off and check to be sure that the machine and motor completely stop before removing the belt cover and V-belt in order to prevent accident caused by abrupt start of the machine or motor.
6. If a servomotor is used with the machine, the motor does not produce noise while the machine is at rest. Be sure not to forget to turn the power off in order to prevent accident caused by abrupt start of the motor.
7. Never use the machine with the cooling opening of the motor power box shielded in order to prevent fire accident by overheat.

#### **Lubrication**

1. For parts of the machine requiring oiling, the specified oil and specified grease should be used.
2. If the oil adheres on your eye or body, be sure to immediately wash it off in order to prevent inflammation or irritation.
3. If the oil is swallowed unintentionally, be sure to immediately consult a medical doctor in order to prevent diarrhea or vomiting.

#### **Maintenance**



1. In prevention of accident caused by unfamiliarity with the machine, repair and adjustment has to be carried out by a service technician who is thoroughly familiar with the machine within the scope defined in the instruction manual. In addition, be sure to use the specified part(s) at the time of replacement of parts. We shall have no liability for any accidents resulting from improper repair or adjustment of the machine and from the use of any part other than specified ones.
2. In prevention of accident caused by unfamiliarity with the machine or electrical-shock accident, be sure to ask an electrical technician of your company or JUKI or distributor in your area for repair and maintenance (including wiring) of electrical components.
3. When carrying out repair or maintenance of the machine which uses air-driven parts such as an air cylinder, be sure to remove the air supply pipe to expel air remaining in the machine beforehand, in order to prevent accident caused by abrupt start of the air-driven parts.
4. Be sure to check that screws and nuts are free from looseness after completion of repair, adjustment and part replacement.
5. Be sure to periodically clean up the machine during its duration of use. Be sure to turn the power off and verify that the machine and motor stop completely before cleaning the machine in order to prevent accident caused by abrupt start of the machine or motor.
6. Be sure to turn the power off and verify that the machine and motor stop completely before carrying out maintenance, inspection or repair of the machine. (For the machine with a clutch motor, the motor will keep running for a while by inertia even after turning the power off. So, be careful.)
7. If the machine cannot be normally operated after repair or adjustment, immediately stop operation and contact JUKI or the distributor in your area for repair in order to prevent accident that can result in personal injury or death.
8. If the fuse has blown, be sure to turn the power off and eliminate the cause of blowing of the fuse and replace the blown fuse with a new one in order to prevent accident that can result in personal injury or death.
9. Be sure to periodically clean up the air vent of the fan and inspect the area around the wiring in order to prevent fire accident of the motor.

#### **Operating environment**

1. Be sure to use the machine under the environment which is not affected by strong noise source (electromagnetic waves) such as a high-frequency welder in order to prevent accident caused by malfunction of the machine.
2. Never operate the machine in any place where the voltage fluctuates by more than "rated voltage  $\pm 10\%$ " in order to prevent accident caused by malfunction of the machine.
3. Be sure to verify that the air-driven device such as an air cylinder operates at the specified air pressure before using it in order to prevent accident caused by malfunction of the machine.
4. To use the machine with safety, be sure to use it under the environment which satisfies the following conditions:
 

Ambient temperature during operation	5°C to 35°C
Relative humidity during operation	35 % to 85 %
5. Dew condensation can occur if bringing the machine suddenly from a cold environment to a warm one. So, be sure to turn the power on after having waited for a sufficient period of time until there is no sign of water droplet in order to prevent accident caused by breakage or malfunction of the electrical components.
6. Be sure to stop operation when lightning flashes for the sake of safety and remove the power plug in order to prevent accident caused by breakage or malfunction of the electrical components.
7. Depending on the radio wave signal condition, the machine may generate noise in the TV or radio. If this occurs, use the TV or radio with kept well away from the machine.
8. In order to ensure the work environment, local laws and regulations in the country where the sewing machine is installed shall be followed.  
In the case the noise control is necessary, an ear protector or other protective gear should be worn according to the applicable laws and regulations.
9. Disposal of products and packages and treatment of used lubricating oil should be carried out properly according to the relevant laws of the country in which the sewing machine is used.

## Precautions to be taken so as to use the PS-800-8045 Series more safely

	<ol style="list-style-type: none"> <li>1. To prevent possible accidents due to electric shocks, neither open the cover of motor electrical box nor touch the component(s) inside the electrical box.</li> <li>2. Make sure of the needle entry after changing the pattern. Should the pattern protrude from the work clamp check, needle interferes with the work clamp check resulting in the danger of occurrence of needle breakage or the like. In addition, check that the work clamp check which has been set corresponds to that which has been installed on the sewing machine.</li> </ol>
	<ol style="list-style-type: none"> <li>1. In case nothing is displayed in the operation panel even when the power switch is turned ON, turn OFF the power switch and check the power voltage and phase.</li> <li>2. In order to protect against personal injury, never place your fingers inside the thread take-up lever, work clamp, work clamp mechanical section and thread take-up lever cover and near the underside of the thread trimmer and needle when turning ON the power switch and while the sewing machine is in operation.</li> <li>3. To prevent possible accidents caused by abrupt start of the sewing machine, turn OFF the power when removing the cover, and ascertain that the sewing machine and the motor have totally stopped.</li> <li>4. When the cassette clamp switch is tuned ON, the cassette clamp cylinder comes down. Never place your hands and/or fingers under the cassette clamp in order to prevent accidents caused by an unexpected startup.</li> <li>5. When the threading button or pattern edit button on the operation panel is pressed, the intermediate presser and disc presser automatically come down. Never place your hands and/or fingers under the intermediate presser and disc presser in order to prevent accidents caused by an unexpected startup.</li> <li>6. To avoid fatal accidents by being caught in the machine, never bring your fingers, hair or clothing close to the moving sections such as handwheel, hand pulley, motor, etc., and never place anything on any of these parts during operation of the machine.</li> <li>7. To avoid personal injury, never operate the machine with the motor cover, eye protection cover, or any other safety devices removed.</li> <li>8. To prevent possible accidents due to electric shocks or damaged electrical component(s), always turn OFF the power switch before connecting or disconnecting the power plug.</li> <li>9. In order to prevent possible accidents due to a ground fault or a dielectric voltage, an appropriate power plug should be installed by a person who has expertise in electricity. In addition, the power plug should be connected to the receptacle which is properly grounded without exceptions.</li> <li>10. During thunder and lightning storms, stop your work and disconnect the power from the outlet to ensure safety and prevent possible accidents due to damaged electrical component(s).</li> <li>11. If the machine is suddenly moved from a cold place to a warm place, dew condensation may result. If this occurs, be sure to confirm that there are no potentially dangerous water drops in the machine before turning it on in order to prevent possible accidents due to damaged electrical component(s).</li> <li>12. In the event of a power failure, be sure to turn OFF the power to the machine to protect against damaged electrical components.</li> <li>13. When the sewing machine is used without a break for many hours, the temperature of a part of the machine body or the rear side of operation panel rises higher by 15°C than the environmental temperature, and you may feel the heat from the part. However, this phenomenon is not abnormal, and does not affect the components or the like.</li> <li>14. Be careful of handling this product so as not to pour water or oil, shock by dropping, and the like since this product is a precision instrument.</li> <li>15. To avoid fatal accidents, use the forklift when lifting and transporting the machine.</li> </ol>





16. To avoid any accident causing injury or death, never place feet on or get on top of the sewing machine table or table stand components.
17. In a domestic environment this product may cause radio interference, in which case the user may be required to make corrective actions.
18. When the machine runs, the cable chain projects backward. It is therefore necessary, when installing the machine, to secure a space behind the machine so as to provide one meter or more distance from the rear of sewing machine where nobody is allowed to enter.
19. Both ends of the X-feed mechanism have been designed to project outside the table of main body of sewing machine. Coming in contact with these ends, while the machine is running, is dangerous since doing so can cause an injury. Be sure to use the sub table, without exceptions, so as to keep people away from the X-feed mechanism.

**Model**            PSRFIDUNIT  
**Description**   RFID module  
**Function**       Reading/writing of sewing patterns

• **Indonesia :**


**PLG ID : 8837**

**Certification no. 63777/SDPPI/2019**



• **Singapore :**

**Certification no. N4261-19**



• **Vietnam :**

**Certification no. C0241141019AF04A2**



• **Malaysia :**

**Certification no. C0241141019AF04A2**



This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

**NOTE:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.


These limits are designed to provide reasonable protection against harmful interference in a residential installation.


This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

# SAFETY DEVICES AND WARNING LABELS

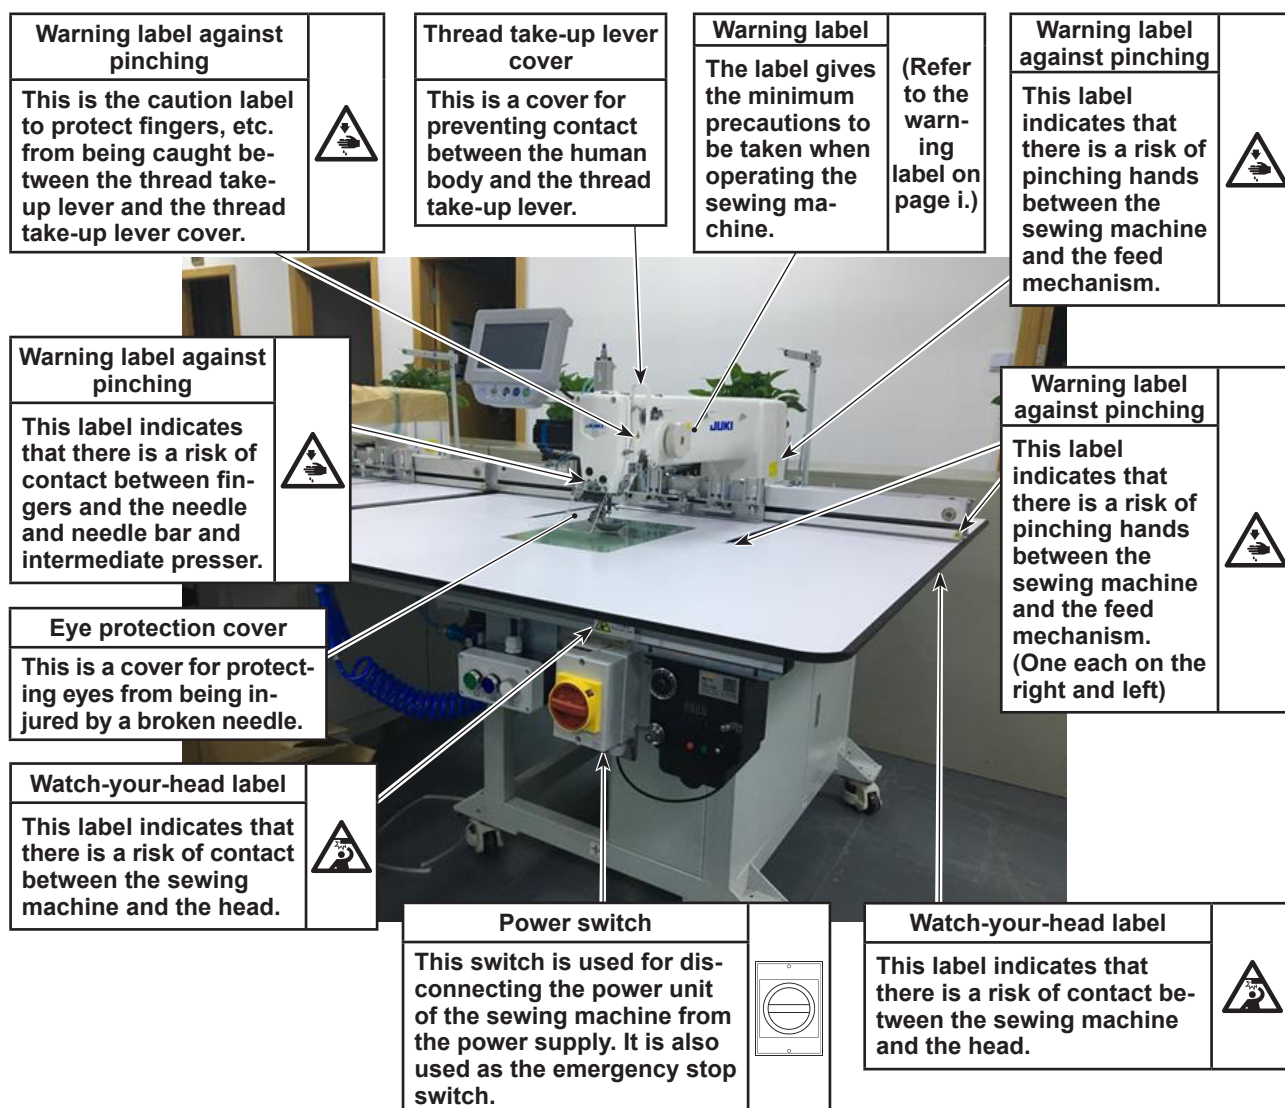

<b>Electrical-shock danger label</b>	 (EU type)	(Refer to "Electrical-shock danger label" on page i.)
In order to protect against electrical shock, safety precautions to be taken to avoid danger are written on this label.		



## CAUTION

In addition, be aware that the safety devices such as the "eye protection cover" and "finger guard" are sometimes omitted in the sketches, illustrations and figures included in the Instruction Manual for the explanation's sake.  
In the practical use, never remove those safety devices.



# Precautions to be observed to ensure safe use of the PS-800.

## Laser type

This section describes the precautions to be observed about the laser.



## **DANGER**

1. This product is intended to be used for sewing and cutting of cloth products. Never use this product for any other purpose.
2. If this product is used with any control device other than the one prescribed in this Instruction Manual or is maintained/used taking any procedure other than the one prescribed in this Instruction Manual, the person in charge can be exposed to dangerous radiation.
3. Direct exposure of the skin and cornea to laser radiation emitted from this product can result in the burn on the skin or the loss of sight.
4. This product is installed with the Class 4 invisible continuous wave laser. The laser light wavelength is 10.6  $\mu\text{m}$ , the beam divergent angle is 3.1 mrad and the maximum output power is 100 W.
5. This product must only be used by the professionally trained operator.  
For the maintenance/repair work on this product, be sure to contact JUKI after-sale service department first. This product must be maintained/repared only by the professional engineer who has received training in a JUKI seminar.
6. Whenever this product is maintained/used, the person in charge must wear specific eye protective equipment without exceptions.  
Refer to the Instruction Manual for this product for the essential standards for the eye protective equipment.
7. Observing the laser tube output with the eye or with an optical telescope or directly looking at the laser light path with the eye will pose a risk to the eyes.
8. Never open the laser tube cover when the laser radiates light.
9. Manage the storage of the laser power key and laser tube cover key in such a way that only the professional engineer who has received training in a JUKI seminar keeps them.
10. Do not use any device other than the laser energy source installed on this product.
11. Refer to the Instruction Manual for the maintenance schedule for this product.
12. Do not place an optical reflection object at the laser radiation aperture.
13. In order to protect the operator who operates this product against direct inhalation of the exhaust gas that is emitted when the laser cutter cuts the material, an exhaust gas discharging facility such as a duct must be installed at the exhaust opening of the blower motor.

**SAFETY DEVICES AND WARNING LABELS**


**LASER TYPE**




Avoid direct exposure or disperse exposure of the eyes and skin to radiation.



Avoid direct exposure or disperse exposure of the eyes and skin to radiation. This product is a Class 4 laser product.

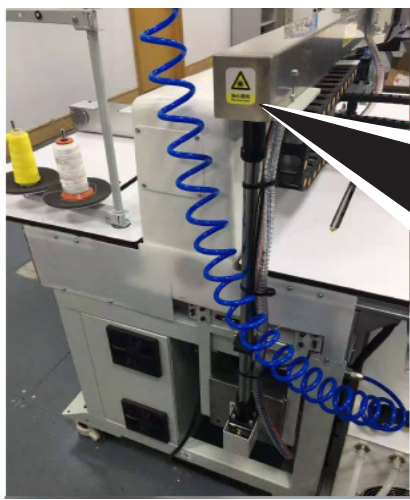


Be careful about the laser.



**DANGER label**  
Avoid direct exposure or disperse exposure of the eyes and skin to radiation. This product is a Class 4 laser product.



<b>Warning label against pinching</b>	
This label indicates that there is a risk of pinching hands between the sewing machine and the laser device mechanism.	

<b>CAUTION label</b>
This is the laser exit port.




Any person other than the professional engineer is allowed to carry out adjustment. Do not remove the cover while the laser is in operation.


<b>DANGER label</b>
If the cover is detached, Class 4 invisible laser beam will leak. Avoid direct exposure or disperse exposure of the eyes and skin to radiation.

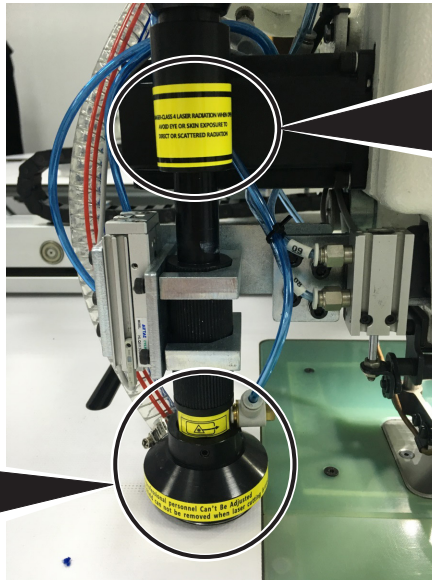


<b>DANGER label</b>
This product causes Class 4 laser beam exposure. When you have detached the cover, be sure to avoid direct exposure or disperse exposure of the eyes and skin to radiation.

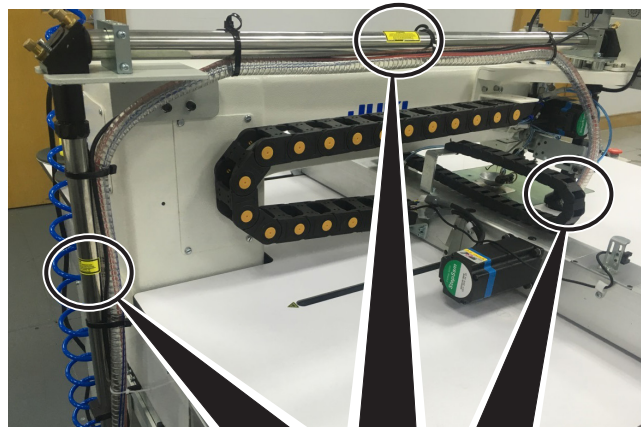


<b>DANGER</b> CLASS 4 INVISIBLE LASER RADIATION WHEN OPEN AND INTERLOCKS DEFEATED AVOID EYE OR SKIN EXPOSURE TO DIRECT OR SCATTERED RADIATION
---

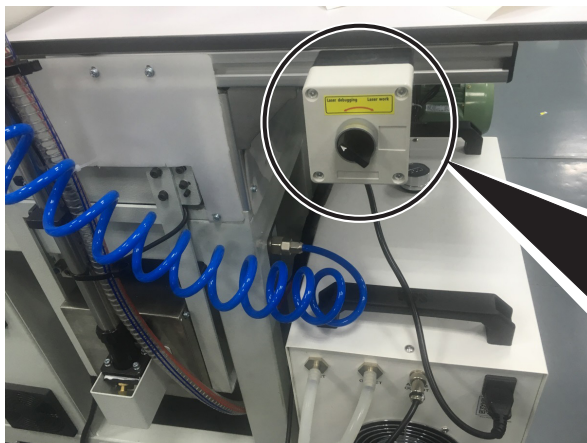

Twist counterclockwise:  
Laser maintenance mode  
Twist clockwise:  
Laser operation mode






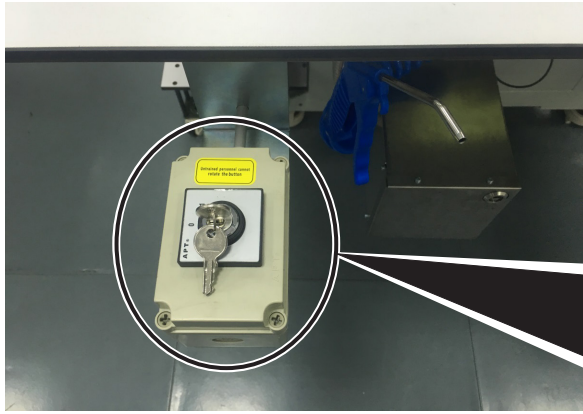

Any person who has not received professional training is not allowed to touch the keys.



## ROTARY KNIFE

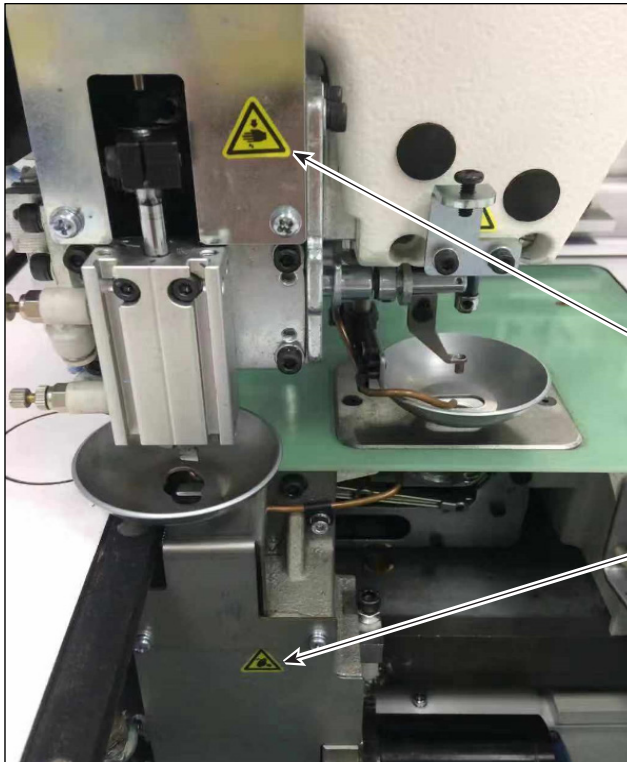

**Warning label against pinching**

This label indicates that there is a risk of contact between fingers and the knife.



**Electrical-shock danger label**

In order to protect against electrical shock, safety precautions to be taken to avoid danger are written on this label.



(Refer to "Electrical-shock danger label" on page i.)

