■"System, setting file write" and "Setting file read"
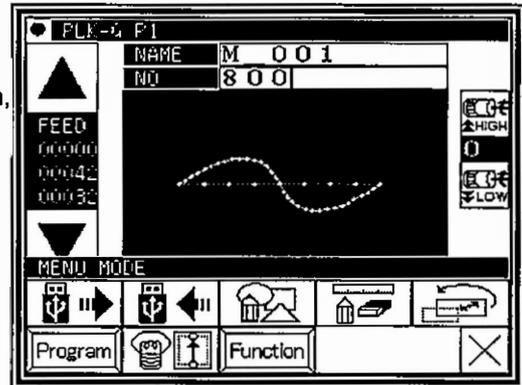
It is possible to restore easily by storing setting changed program mode on the USB memory to return later.
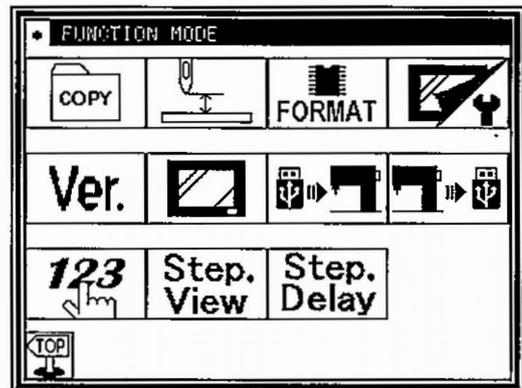
■System, setting file write

(1)Entering the function mode

►Press [MENU] and [Function] on the Standard screen, and open the Function Mode screen.

(2)Function mode screen

►Press [🖥 ▯▶ 📼].

(3)Writing setting file

►Press [📼◀ TBL], then press [↵].
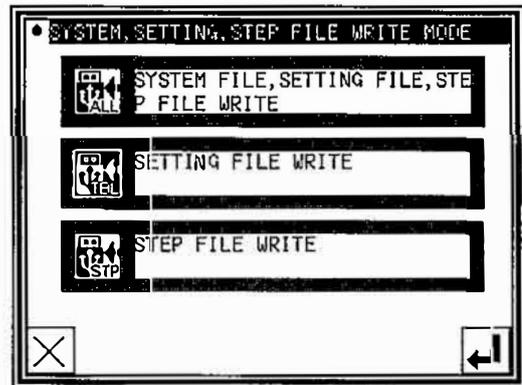
(4)Naming setting file

►Insert the USB memory to the connector.

►Name the setting file by character buttons, then press

[↵].

►Setting file will be preserved into the [USER_system] folder in the USB memory.
Please note if the same name is exist, it is overwritten.